

## **General Disclaimer**

### **One or more of the Following Statements may affect this Document**

- This document has been reproduced from the best copy furnished by the organizational source. It is being released in the interest of making available as much information as possible.
- This document may contain data, which exceeds the sheet parameters. It was furnished in this condition by the organizational source and is the best copy available.
- This document may contain tone-on-tone or color graphs, charts and/or pictures, which have been reproduced in black and white.
- This document is paginated as submitted by the original source.
- Portions of this document are not fully legible due to the historical nature of some of the material. However, it is the best reproduction available from the original submission.

## NASA Contractor Report 165921

(NASA-CR-165921) OFF-NADIR ANIENNA BIAS  
CORRECTION USING AMAZON RAIN SIGMA(C) DATA  
(Kansas Univ. Center for Research, Inc.)  
83 p HC A05/MF A01 CSCL 09E

N83-20004

Unclas  
63/33 10566

### OFF-NADIR ANTENNA BIAS CORRECTION USING AMAZON RAIN FOREST $\sigma^0$ DATA

I. J. BIRRER  
UNIVERSITY OF KANSAS CENTER FOR RESEARCH INC.  
LAWRENCE, KANSAS 66045

G. J. DOME  
BELL LABORATORIES  
HOLMDEL, NEW JERSEY

J. SWEET  
KENTRON TECHNICAL CENTER  
HAMPTON, VIRGINIA 23665

G. BERTHOLD  
R. K. MOORE  
UNIVERSITY OF KANSAS CENTER FOR RESEARCH INC.  
LAWRENCE, KANSAS 66045

LIBRARY COPY


MAY 1982  
GRANT NSG 1397

MAY 2 1982

**NASA**

National Aeronautics and  
Space Administration

Langley Research Center  
Hampton, Virginia 23665



LANGLEY RESEARCH CENTER  
LIBRARY, NASA  
HAMPTON, VIRGINIA

# TABLE OF CONTENTS

ORIGINAL PAGE IS  
OF POOR QUALITY

LIST OF TABLES . . . . .	11
LIST OF FIGURES. . . . .	111
ABSTRACT . . . . .	1
1.0 INTRODUCTION. . . . .	2
2.0 BACKGROUND. . . . .	3
3.0 DEVELOPMENT OF MAPS USED TO CLASSIFY BRAZIL TARGETS . . . . .	5
3.1 Land-Water Map . . . . .	5
3.2 Vegetation Map . . . . .	7
4.0 CHARACTERIZATION OF $\sigma^0$ SIGNATURE USING SEASAT SCATTEROMETER DATA. . . . .	8
4.1 The SEASAT-A Scatterometer System (SASS) . . . . .	8
4.2 Target Stability of the Amazon Rain Forest . . . . .	13
4.3 Incidence Angle Dependence and Diurnal Variation . . . . .	18
4.4 SEASAT Summary . . . . .	25
5.0 DEVELOPMENT OF OFF-NADIR ANTENNA BIAS CORRECTIONS FOR NOSS. . . . .	26
5.1 Description of NOSS Scatterometer System . . . . .	26
5.2 Development of Maximum Likelihood (ML) Algorithm to Estimate Off-Nadir Bias Parameters. . . . .	26
5.2.1 Relative Bias and Pointing Angle Estimation . . . . .	28
5.2.2 Long-Term Monitoring of Relative Bias . . . . .	32
5.3 Implementation of Off-Nadir Bias Algorithm for NOSS SCATT. . . . .	34
5.3.1 Co-Location of SCATT and LAMMR. . . . .	34
5.3.2 Flagging Rain Cells . . . . .	37
5.3.3 Data Base Creation. . . . .	39
5.3.4 Standard Target Creation. . . . .	39
5.3.5 Relative Bias and Pointing Angle Estimation . . . . .	40
6.0 CONCLUSIONS AND FUTURE RESEARCH . . . . .	40
REFERENCES . . . . .	41
APPENDIX A . . . . .	42
A-1 Program Listing for Digitized Land/Water and Vegetation Maps . . . . .	43
A-2 Land/Water Tables. . . . .	46
A-3 Vegetation Tables. . . . .	55
APPENDIX B: Plots of Incidence Angle Variations for Beam 1,2,3 . . . . .	58
APPENDIX C: NOSS Algorithm Specification Sheets . . . . .	64

## LIST OF TABLES

TABLE 1:	Codes Used in Vegetation Map . . . . .	8
TABLE 2:	Regression Parameters for the Incidence Angle Response of SASS Data Over Brazil . . . . .	21
TABLE 3:	Summary of Diurnal Effect at 40° Incidence Angle Vertical Polarization, . . . . .	25

# LIST OF FIGURES

ORIGINAL PAGE IS  
OF POOR QUALITY

FIGURE 1:	Extent of Brazilian Rain Forest . . . . .	4
FIGURE 2:	Sample SKYLAB Time History over Amazon Rain Forest. . . . .	6
FIGURE 3:	SEASAT Scatterometer Swath Coverage . . . . .	9
FIGURE 4:	Calculation of SASS Received Power. . . . .	11
FIGURE 5:	Doppler Cell Area Determined by Antenna Pattern and Filter Response . . . . .	12
FIGURE 6:	$\sigma^0$ Time History for Rev 952; V-polarization; Cells 1,2,3. .	15
FIGURE 7:	$\sigma^0$ Time History for Rev 952; V-polarization; Cells 4,5,7. .	16
FIGURE 8:	Target Stability During SEASAT Mission. . . . .	17
FIGURE 9:	Mean $\sigma^0$ vs Incidence Angle; Beam 4; V-polarization. . . . .	19
FIGURE 10:	Estimated $\sigma^0$ From Regression Fit. . . . .	23
FIGURE 11:	Comparison of VV-pol and HH-pol Data. . . . .	24
FIGURE 12:	Proposed NOSS Footprint . . . . .	27
FIGURE 13:	Proposed Processing of NOSS Scatterometer (SCATT) Data to Obtain $\sigma^0$ . . . . .	35
FIGURE 14:	Processing Required for Off-Nadir Bias Correction . . . . .	36
FIGURE 15:	Nature of Expected Amazon $T_B$ Distribution . . . . .	38

## SUMMARY

ORIGINAL PAGE IS  
OF POOR QUALITY

The radar response from the Amazon rain forest has been studied to determine the suitability of this region for use as a standard target to calibrate a scatterometer like that proposed for the National Oceanic Satellite System (NOSS). Backscattering observations made by the SEASAT-1 Scatterometer System (SASS) show the Amazon rain forest to be a homogeneous, azimuthally-isotropic, radar target which is insensitive to polarization. The variation with angle of incidence may be adequately modeled as  $\sigma^0_{(dB)} = a\theta + b$  with typical values for the incidence-angle coefficient,  $a$ , from 0.07 - 0.15 dB/deg. Variation of the intercept,  $b$ , was from -0.6 to -4.4 dB. A small diurnal effect occurs, with measurements at sunrise being 0.5 dB - 1 dB higher than the rest of the day.

Maximum-likelihood estimation algorithms presented here permit determination of relative bias and true pointing angle for each beam. Specific implementation of these algorithms for the proposed NOSS scatterometer system is also discussed.

---

Much of the information in this report can be found in the paper by I.J. Birrer, E.M. Bracalente, G.J. Dome, J. Sweet and G. Berthold, " $\sigma^0$  Signature of the Amazon Rain Forest Obtained from the Seasat Scatterometer," IEEE Transactions on Geoscience and Remote Sensing, vol. GE-20, no. 1, January 1982, pp. 11-17.

## 1.0 INTRODUCTION

The National Oceanic Satellite System Scatterometer (NOSS SCATT) was designed to determine wind vectors on the ocean's surface by measuring radar backscatter from the surface. The SCATT was to be a fan-beam scatterometer utilizing six dual-polarized (V and H) antennas.

To achieve maximum wind-vector accuracy, careful cross-calibration between antennas must be performed. This report discusses the development of a calibration technique utilizing measurements of the scattering coefficient  $\sigma^0$  from the Amazon rain forest. A brief discussion is presented of the method used to discriminate rain-forest signals from others. Maps (used to screen Brazil data) generated for this purpose are on a  $0.25^\circ \times 0.25^\circ$  grid for locating rivers and a  $0.5^\circ \times 0.5^\circ$  grid for identifying vegetation types.

The suitability of the Amazon rain forest for use as a calibration target is shown in Section 4.0. From July to October 1978 numerous backscatter measurements were made by the SEASAT-1 Scatterometer System (SASS). These measurements show the rain forest to be a homogeneous, azimuthally-isotropic radar target which is insensitive to polarization. Variation of  $\sigma^0$  with respect to incidence angle may be adequately modeled with a straight line fit of the form:  $\sigma^0_{(dB)} = a\theta + b$ , where  $\theta$  is the angle of incidence (deg.). Measured values for the incidence angle coefficient,  $a$ , range from 0.07 - 0.15 dB/deg depending on beam and time of day. Values for the intercept,  $b$ , range from -0.6 to -4.4 dB. A small diurnal effect was observed with measurements made at sunrise (0500-0630) being consistently 0.5 - 1.0 dB higher than the rest of the day.

To cross-calibrate the beams on a multibeam scatterometer, two parameters, a relative bias and the true antenna pointing angle, must be determined for each beam. Development of two maximum-likelihood-estimation

ORIGINAL PAGE IS  
OF POOR QUALITY

algorithms to determine these parameters using Amazon rain forest data is discussed in Section 5.0. The first algorithm is used to determine both relative bias and true pointing angle. A second and considerably simpler version is then developed to monitor long-term changes in relative bias due to drift in the instrument gain and transmitter power. Specific processing required to implement these algorithms for the SCATT is also discussed in Section 5.0.

## 2.0 BACKGROUND

During the SEASAT program, the need for in-flight cross-calibration for antennas from a multibeam scatterometer became apparent. The originally proposed procedure using aircraft underflights proved inadequate. Based on the consistency of  $\sigma^0$  data over the rain forest obtained during SKYLAB, R.K. Moore of The University of Kansas suggested using the Amazon rain forest data as a means of calibration.

The accompanying map (Figure 1) shows the vast extent of the Amazon rain forest. It includes an area of more than 3,000,000 km<sup>2</sup>. Because of its equatorial location, seasonal effects are minimized and vegetation is always present. The region is very flat and uniformly forested except for breaks in the canopy over the Amazon River and its principal tributaries. The predominant climate is hot and humid, with annual precipitation as high as 3000 mm. A slight decrease in rainfall is observed in the large central part of the rain forest during the months of October to December. A similar decrease takes place in the northern part during the months of June to September. In the northwest a more significant decrease in rainfall occurs during May and June with the lowest rainfall in July and August.



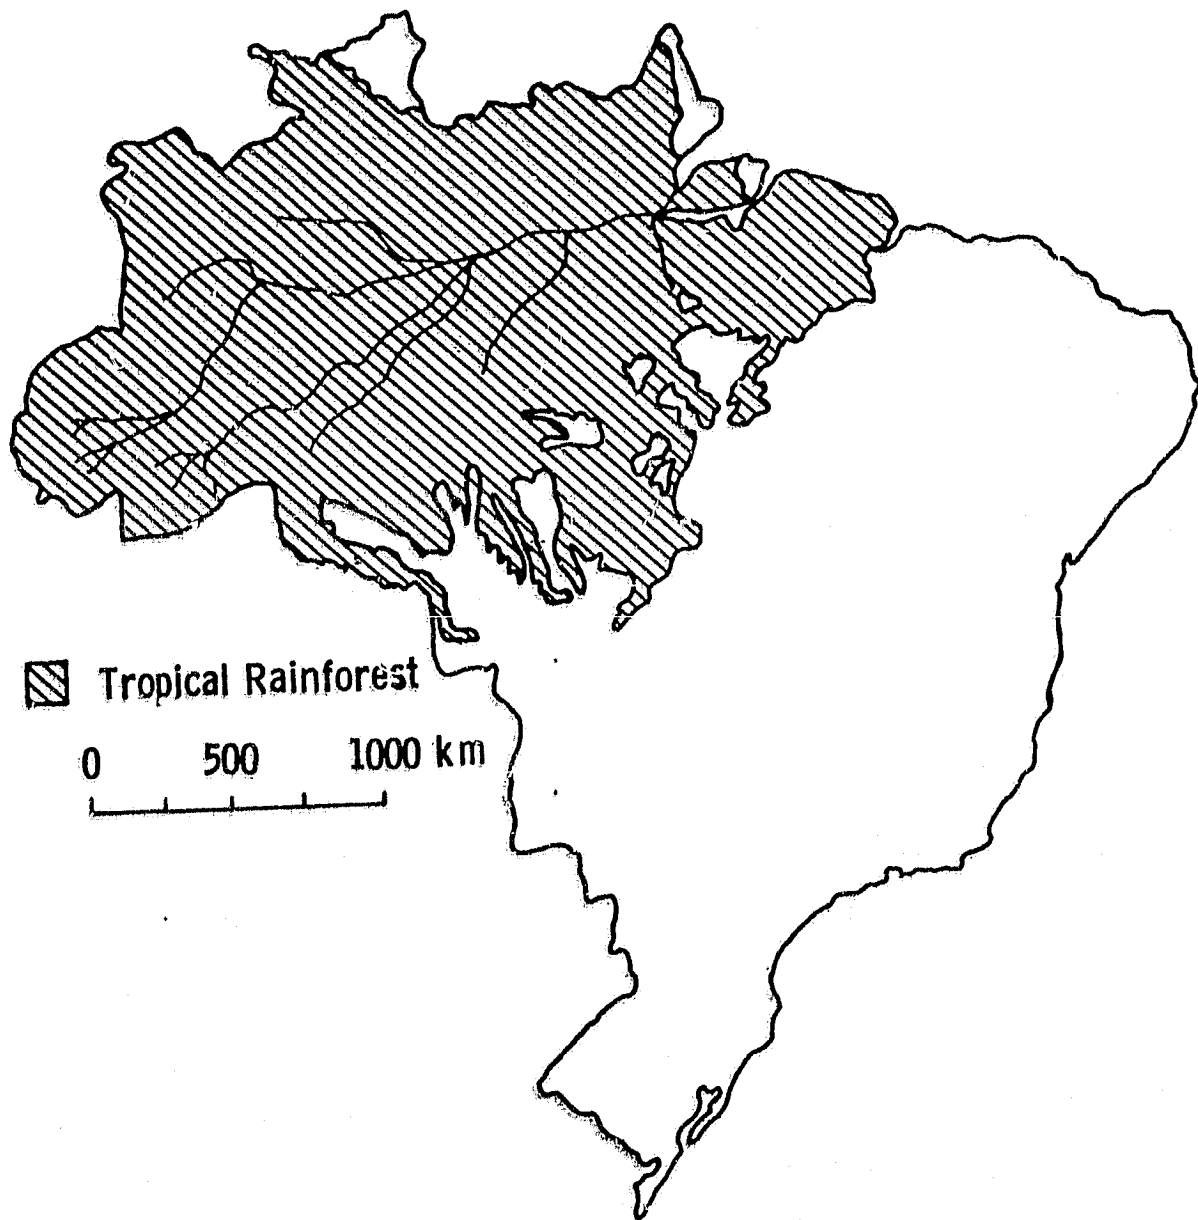


FIGURE 1: Extent of Brazilian Rain Forest

During the SKYLAB SL-2 mission vertical-polarization measurements were made over the Amazon rain forest at incidence angles of  $32^{\circ}$  to  $36^{\circ}$ . Figure 2 shows a sample time history taken during one of the SKYLAB passes over the eastern part of the forest. The scattering coefficient was stable with a maximum deviation of about 0.2 dB. For the combined set of SKYLAB measurements the mean value of  $\sigma^0$  was reported as  $\approx -5.9$  dB with a standard deviation of 1 dB [1,2]. This observed consistency prompted the further investigation using the SEASAT scatterometer.

### 3.0 DEVELOPMENT OF MAPS USED TO CLASSIFY BRAZIL TARGETS

#### 3.1 Land-Water Map

For the early analysis of SEASAT observations of Brazil, discrimination was achieved by using vegetation maps developed during the SKYLAB program [2]. The  $1^{\circ} \times 1^{\circ}$  grid available was thought to be adequate. However, as noted in Section 4.2, the presence in the SASS footprint of the Amazon River or one of its principal tributaries markedly lowered the radar cross-section. Since the SCATT was planned to operate with an even smaller footprint, a finer map grid was needed to screen out data contaminated by the presence of rivers.

For NOSS a digitized map was created with a  $0.25^{\circ} \times 0.25^{\circ}$  grid. The source map was produced by the Department of Cartography of the Brazilian Institute of Geography in 1971. This map of the entire Amazon basin is scaled at approximately 3 inches per degree. The digitized map was created by overlaying grids to subdivide the source map into  $0.25^{\circ}$  boxes. Codes were then assigned to each box using the following conventions:

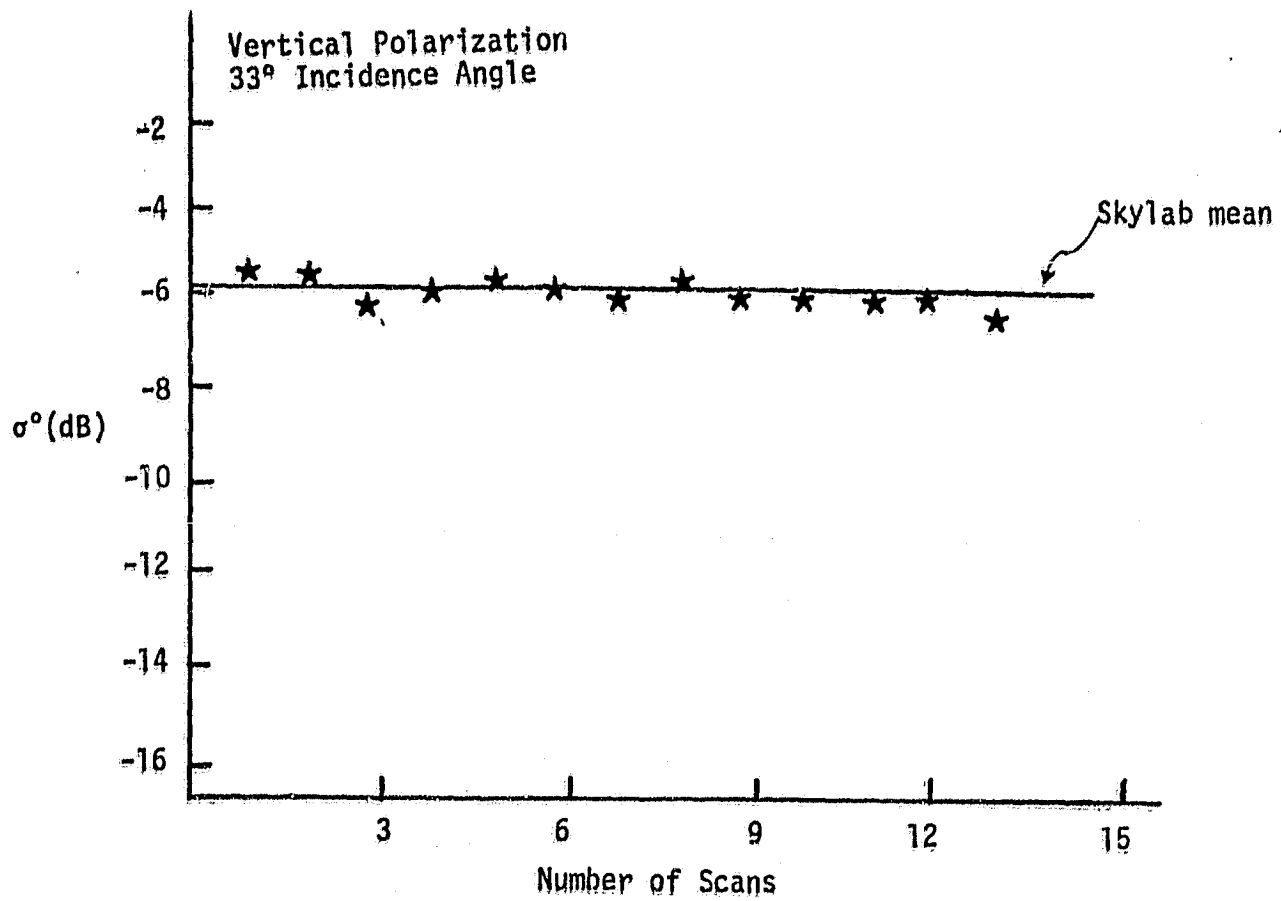


FIGURE 2: Sample SKYLAB Time History over Amazon Rain Forest

- 0 - flatland only (no significant rivers)
- 1 - some small rivers but mostly land
- 2 - large rivers through box
- 3 - rough terrain

The results of this procedure were then encoded into a computer algorithm. For a given latitude and longitude the algorithm will fetch the code of the box containing the location. This map was tested during the extensive analysis of SEASAT data discussed in Section 4.0.

For NOSS it was envisioned to use the computed location of the center of the Doppler cell for classification. A more careful screening could be performed by using the latitudes and longitudes of the corner points for a particular Doppler cell. Testing to be sure that all four corners showed a "land-only" condition would be a check against overlapping part of a river-filled box.

### 3.2 Vegetation Map

To further classify Brazilian data a vegetation map for the Amazon basin was produced with a  $0.5^{\circ} \times 0.5^{\circ}$  grid. Codes were assigned to each box according to the conventions listed in Table 1. Six distinct types of vegetation are found in the Amazon basin. Types 1 and 2 are the forests which are suitable for use as a standard target. Combinations of types were only designated if the dominant vegetation was either type 1 or type 2. Otherwise, they were coded with a 3, 4, 5, or 6, depending on the dominant type.

This map was incorporated into an algorithm similar to the land-water algorithm. For a particular latitude and longitude the code is retrieved for the box containing that location. This algorithm was used during the

TABLE 1  
Codes Used In Vegetation Map

Type (Code)	Description
0	Outside of Brazil Rain Forest
1	Humid Upper Amazon
2	Humid Firm Land
3	Humid Floodlands
4	Humid Plains
5	Mountainous Region
6	Savannah
7	Combination Types 1,4
8	2,4
9	1,2,4
10	1,2
11	2,6
12	2,4,6
13	1,2,3,6
14	1,6
15	2,3,6
16	2,3
17	1,2,3
18	1,3
19	2,5
20	2,5,6

SASS analysis to remove all data from vegetation types 3,4,5, and 6. A similar approach is recommended for a NOSS-type of system.

#### 4.0 CHARACTERIZATION OF $\sigma^0$ SIGNATURE USING SEASAT SCATTEROMETER DATA

##### 4.1 The SEASAT-A Scatterometer System (SASS)

The SASS operated using four dual-polarized (V and H)  $0.5^\circ \times 25^\circ$  fan-beam antennas. The antennas were pointed  $45^\circ$  from the satellite subtrack to give a "star-like" illumination pattern on the surface [3]. (see Figure 3). This configuration provided for pairs of nearly orthogonal measurements of the earth's surface. The SASS instrument transmitted a 100-watt 14.6-GHz signal. The backscattered signal was spread out in frequency due to the Doppler effect. Using 15 parallel channels (each consisting of a Doppler filter, a square-law detector, and a gated integrator), the reflected power

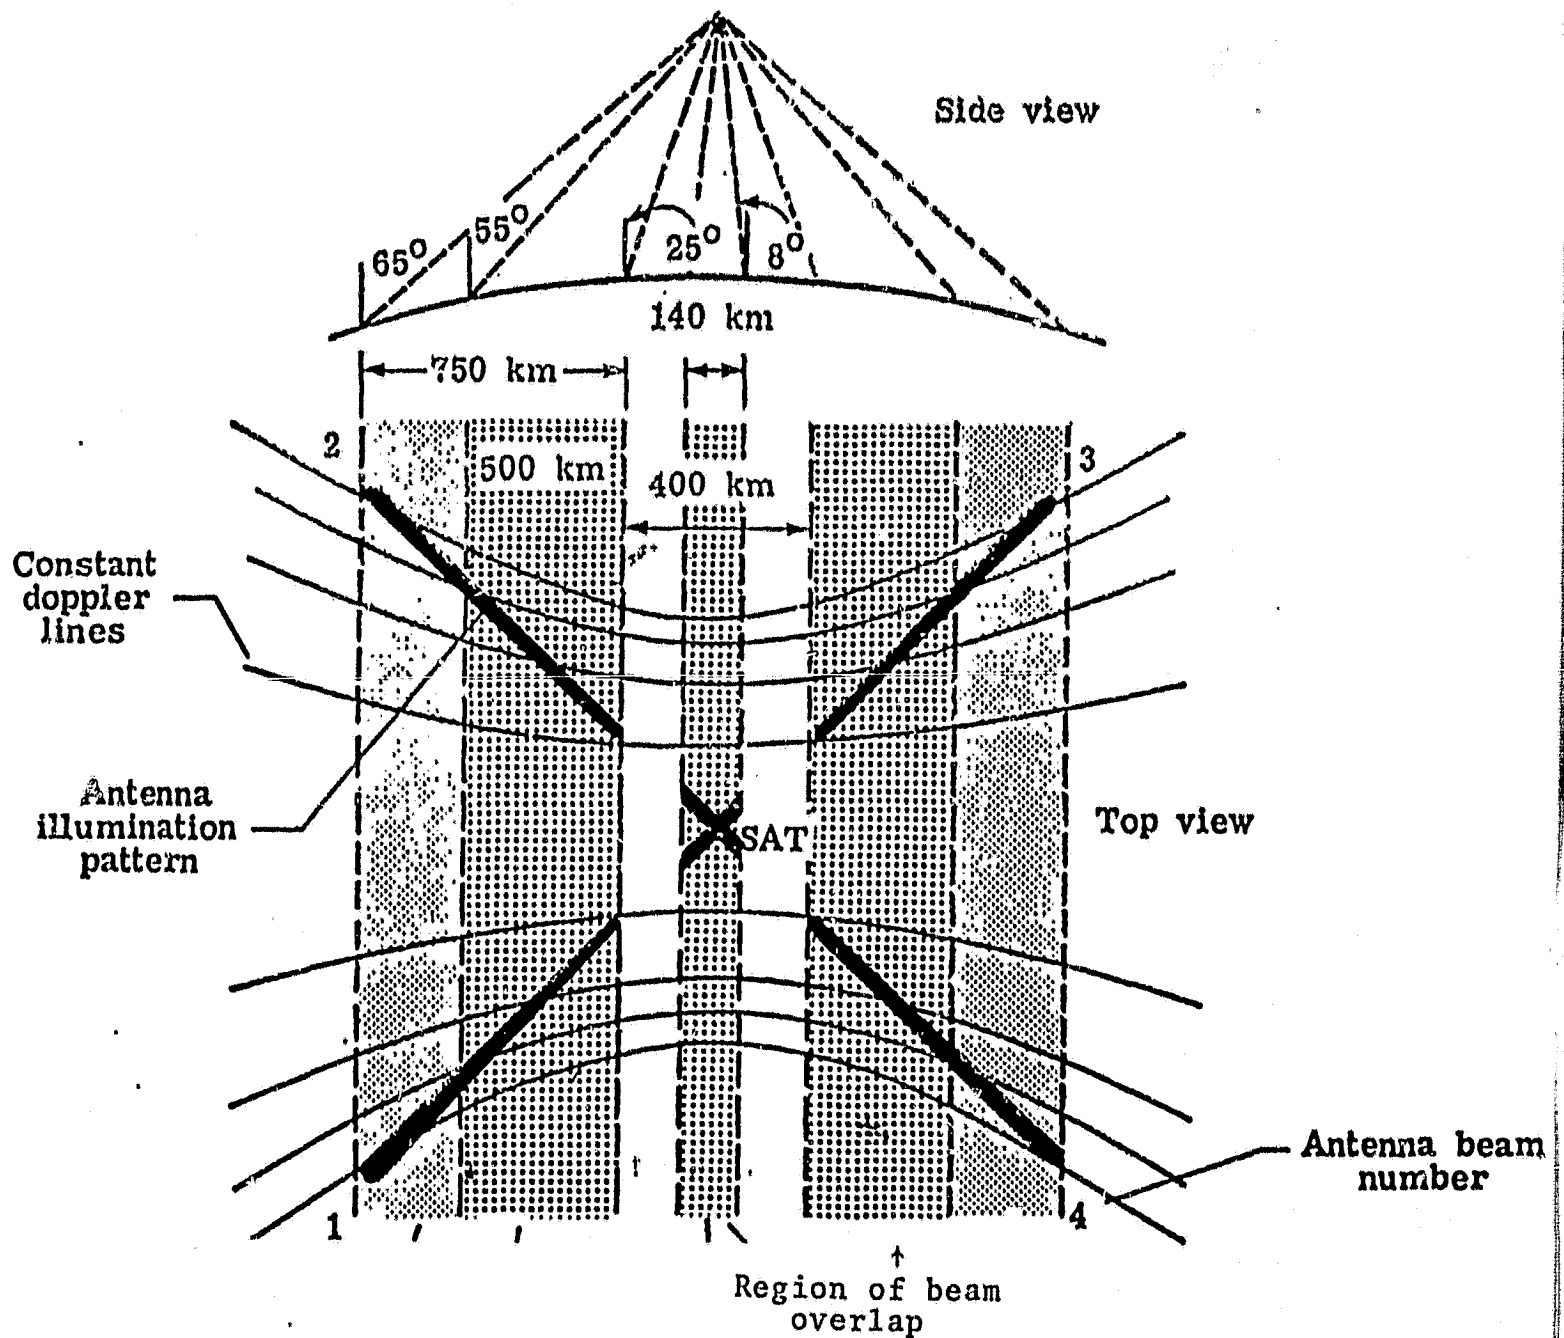


FIGURE 3: SEASAT Scatterometer Swath Coverage

from one antenna was sampled 61 times during a 1.89-sec measurement period. The mean values of the 61 integrated voltage levels of signal plus noise and noise alone from each of the 15 channels were transmitted to the ground. The power reflected from the earth's surface was determined from these voltage pairs, the calibrated gain of the receiver, and the known integration time, as indicated in Figure 4.

Figure 5 shows an enlarged view of one of the 15 Doppler cells synthesized along the beam. As illustrated, the Doppler-cell area is determined by the  $0.5^\circ$  3-dB beamwidth in the narrow-beam plane and the Doppler filter along the beam. Due to the 1.89-sec measurement time the Doppler cell is smeared in the alongtrack direction to give the resultant cell shown in the lower inset. The integrated Doppler cells are between 16-20 km wide and 50-70 km long.

The frequencies selected for the Doppler filters result in three near-nadir resolution cells ( $0^\circ$  -  $13^\circ$  incidence angle) and twelve off-nadir cells ( $20^\circ$  -  $65^\circ$  incidence angle). Only the off-nadir measurements were used in this analysis since the near-nadir returns were outside the main antenna beam.

The value of  $\sigma^0$  can be determined by solving the radar equation in the following form:

$$P_R = \frac{P_T \lambda^2 L_S G_0^2}{(4\pi)^3} \int_A \frac{\left(\frac{G}{G_0}\right)^2 \sigma^0 h(f)}{R^4} dA \quad (1)$$



where:

$P_R$  = received power

$P_T$  = transmitted power

$\lambda$  = transmitted wavelength

$L_S$  = miscellaneous losses

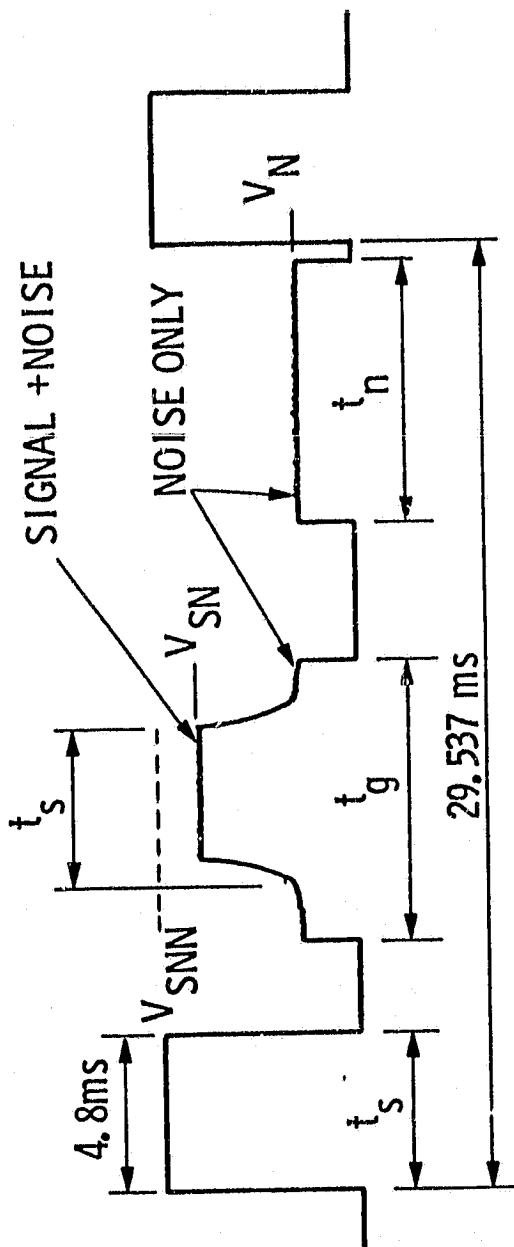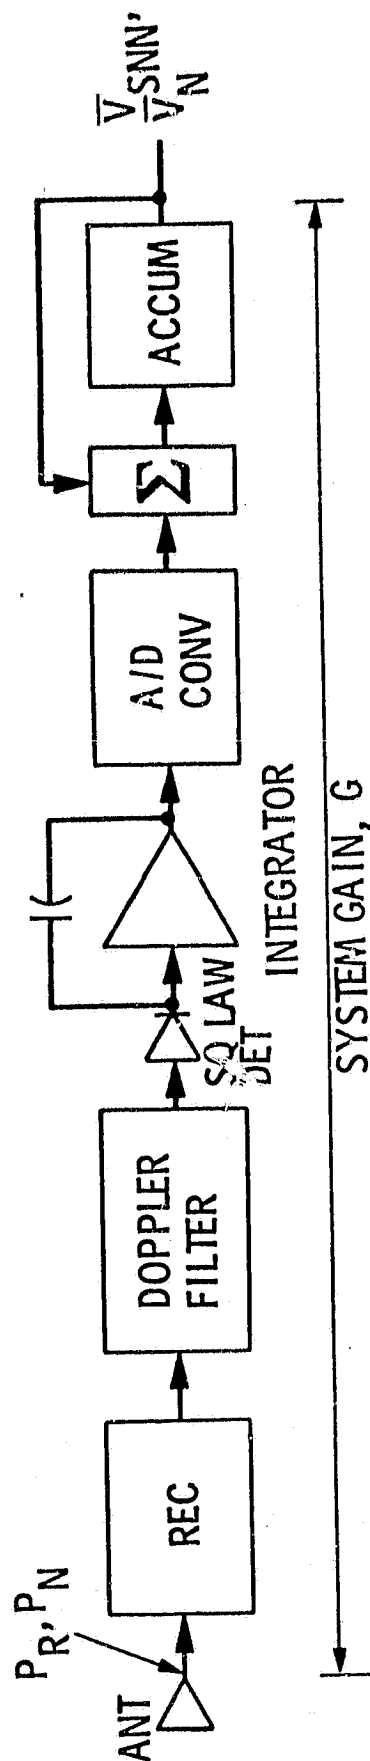

$$\begin{aligned}
 T_S &= 61 \times t_s = 0.2928 \text{ (ALL CHANNELS)} \\
 T_G &= 61 \times t_g = 0.345 \text{ TO } 0.69 \\
 T_N &= 61 \times t_n = 0.4818 \text{ (ALL CHANNELS)} \\
 V_{SNN} &= T_S (P_R + P_N) + (T_G - T_S) P_N^G \\
 \bar{V}_{SN} &= \bar{V}_{SNN} - \frac{T_G - T_S}{T_N} \bar{V}_N \quad (1) \\
 P_{SN} &= \frac{\bar{V}_{SN}}{T_S G} \quad \text{-- SIGNAL + NOISE POWER} \quad (3) \\
 P_N &= \frac{\bar{V}_N}{T_N G} \quad \text{-- NOISE POWER} \quad (4) \\
 P_R &= \frac{\bar{V}_{SN}}{T_S G} - \frac{\bar{V}_N}{T_N G} \quad \text{-- SIGNAL POWER} \quad (5) \\
 \text{WHERE: } G &= \frac{\bar{V}_{SNN} + \bar{V}_N}{P_N (T_G + T_N)} \quad (6)
 \end{aligned}$$

FIGURE 4: Calculation of SASS Received Power

ORIGINAL PAGE IS  
OF POOR QUALITY



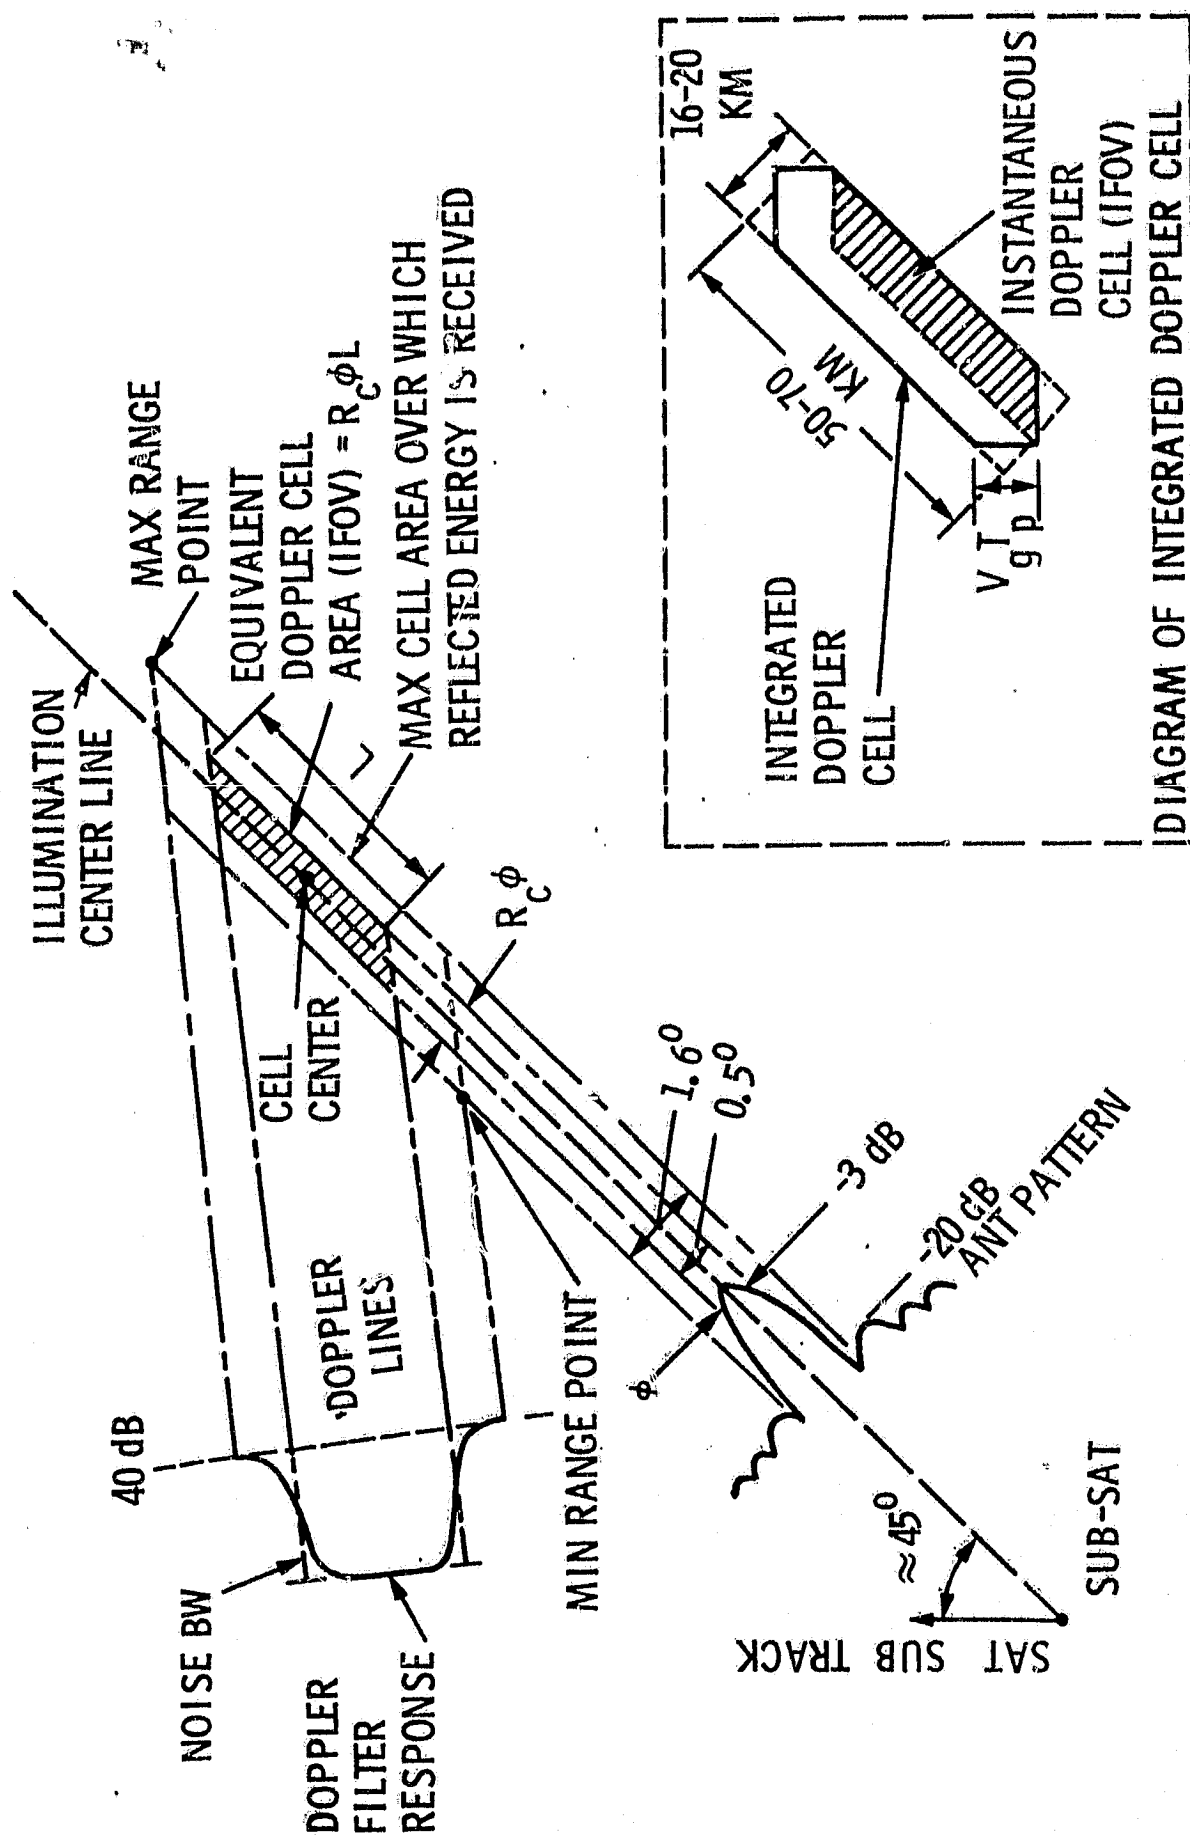


FIGURE 5: Doppler Cell Area Determined by Antenna Pattern and Filter Response

ORIGINAL PAGE IS  
OF POOR QUALITY

$G_0$  = peak antenna gain

$\frac{G}{G_0}$  = relative gain at center of cell

$h(f)$  = frequency response of Doppler filter

$R$  = range to cell center

Equation (1) may be solved for  $\sigma^0$  as:

$$\sigma^0 = \frac{(4\pi)^3 P_R R^4}{P_T \lambda^2 L_S G_0^2 \left(\frac{G}{G_0}\right)^2 A} \quad (2)$$

assuming:

$$h(f) = \begin{cases} 1 & f_l < f < f_u \\ 0 & \text{otherwise} \end{cases}$$

where:

$A = L R \phi_A$ , where  $L$  is the distance on earth's surface from  $f_l$  to  $f_u$

$f_0$  = center frequency

$B_n$  = noise bandwidth (Doppler filter)

$f_l, f_u$  = upper and lower Doppler-filter cutoff frequencies

$\phi_A$  = narrow dimension antenna beamwidth (radians)

$$f_l = f_0 - \frac{B_n}{2}$$

$$f_u = f_0 + \frac{B_n}{2}$$

A particular  $\sigma^0$  is calculated by evaluating equation (2) using measured values for  $P_R$  and  $P_T$ , values for  $G_0$  and  $\frac{G}{G_0}$  obtained from a lookup table, and computed values for  $R$  and  $A$  [4].

#### 4.2 Target Stability of the Amazon Rain Forest

Initially the SASS data were processed by scientists at NASA Langley Research Center to produce time histories of  $\sigma^0$  over Brazil [4]. Figures

Pl 952  
6 and 7 show sample time histories of Beam 1 vertical-polarization measurements made during an orbit identified as Rev 952. The radar-cross-section stability over the Amazon rain forest was similar to that observed during the SKYLAB mission. When the rain forest results are compared with the observations over the ocean, three striking differences are noted: (1)  $\sigma^0$  is consistently higher over the rain forest (except at the smallest incidence angle), (2)  $\sigma^0$  is much more stable over the rain forest, and (3) the variation in  $\sigma^0$  with incidence angle is much less. As can be seen in both Figures 6 and 7, SASS cells which included part of the Amazon or one of its major tributaries were easily identified by the sudden 1-3 dB drop in  $\sigma^0$ .

Since the goal of the research was to determine the Amazon rain forest's suitability as a standard target, tests were made for both temporal and regional stability. Comparing data taken at the same time of day over the same flight line throughout the mission provided a useful test for seasonal effects. Figure 8 shows the results of one of these comparisons. Approximately 10 measurements were averaged at each incidence angle to estimate the mean  $\sigma^0$ . The deviation of the mean  $\sigma^0$  is negligible near the peak antenna gain ( $\theta_1 = 44^\circ$ ) except for the September 18 measurements at  $40^\circ$ . This discrepancy may be due to atmospheric attenuation. At the extremes of the incidence-angle range the deviation is less than 0.5 dB. However, due to the short lifetime of SEASAT (99 days, July-October), further research is needed to determine if any seasonal effects exist. The values of the mean  $\sigma^0$  for a particular time of day were compared over numerous flight lines to test for regional effects. No consistent discrepancies were observed over the rain forest. As a result of these tests, the entire SEASAT rain-forest data set was analyzed as a unit.

-15-

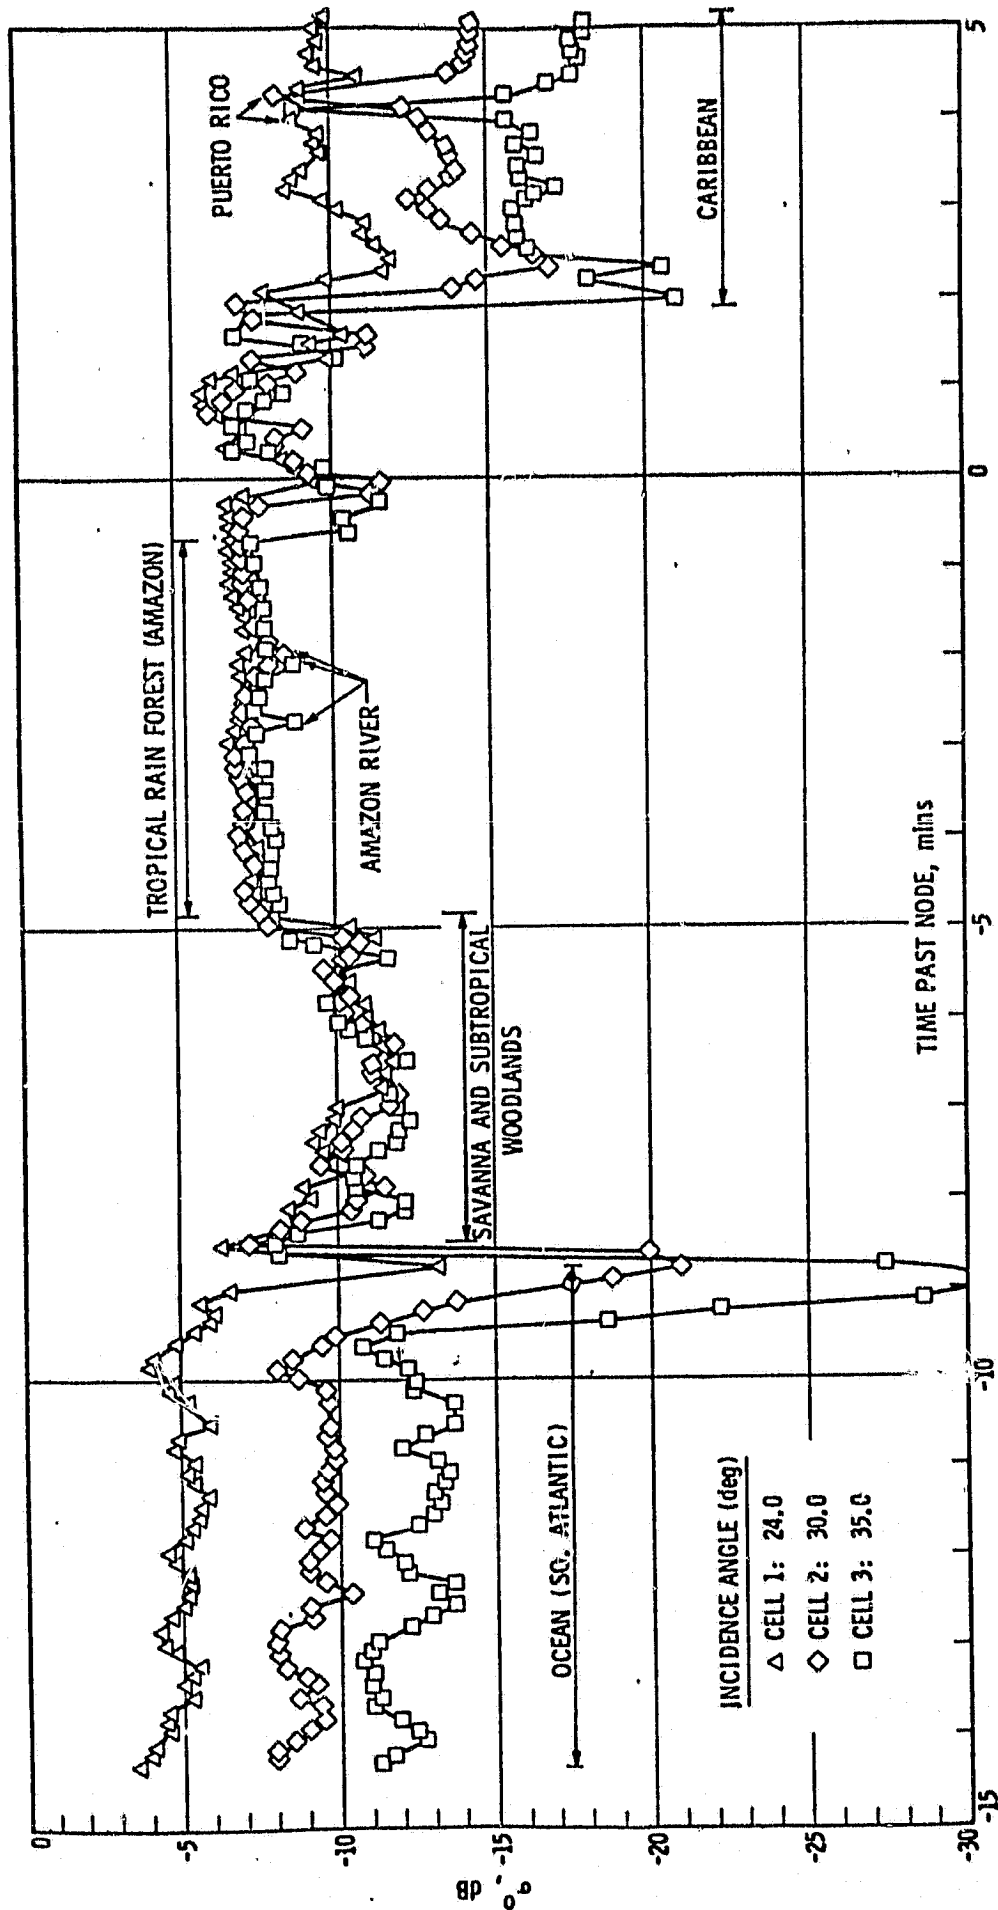


FIGURE 6:  $\sigma^0$  Time History for Rev 952; V-polarization; Cells 1,2,3

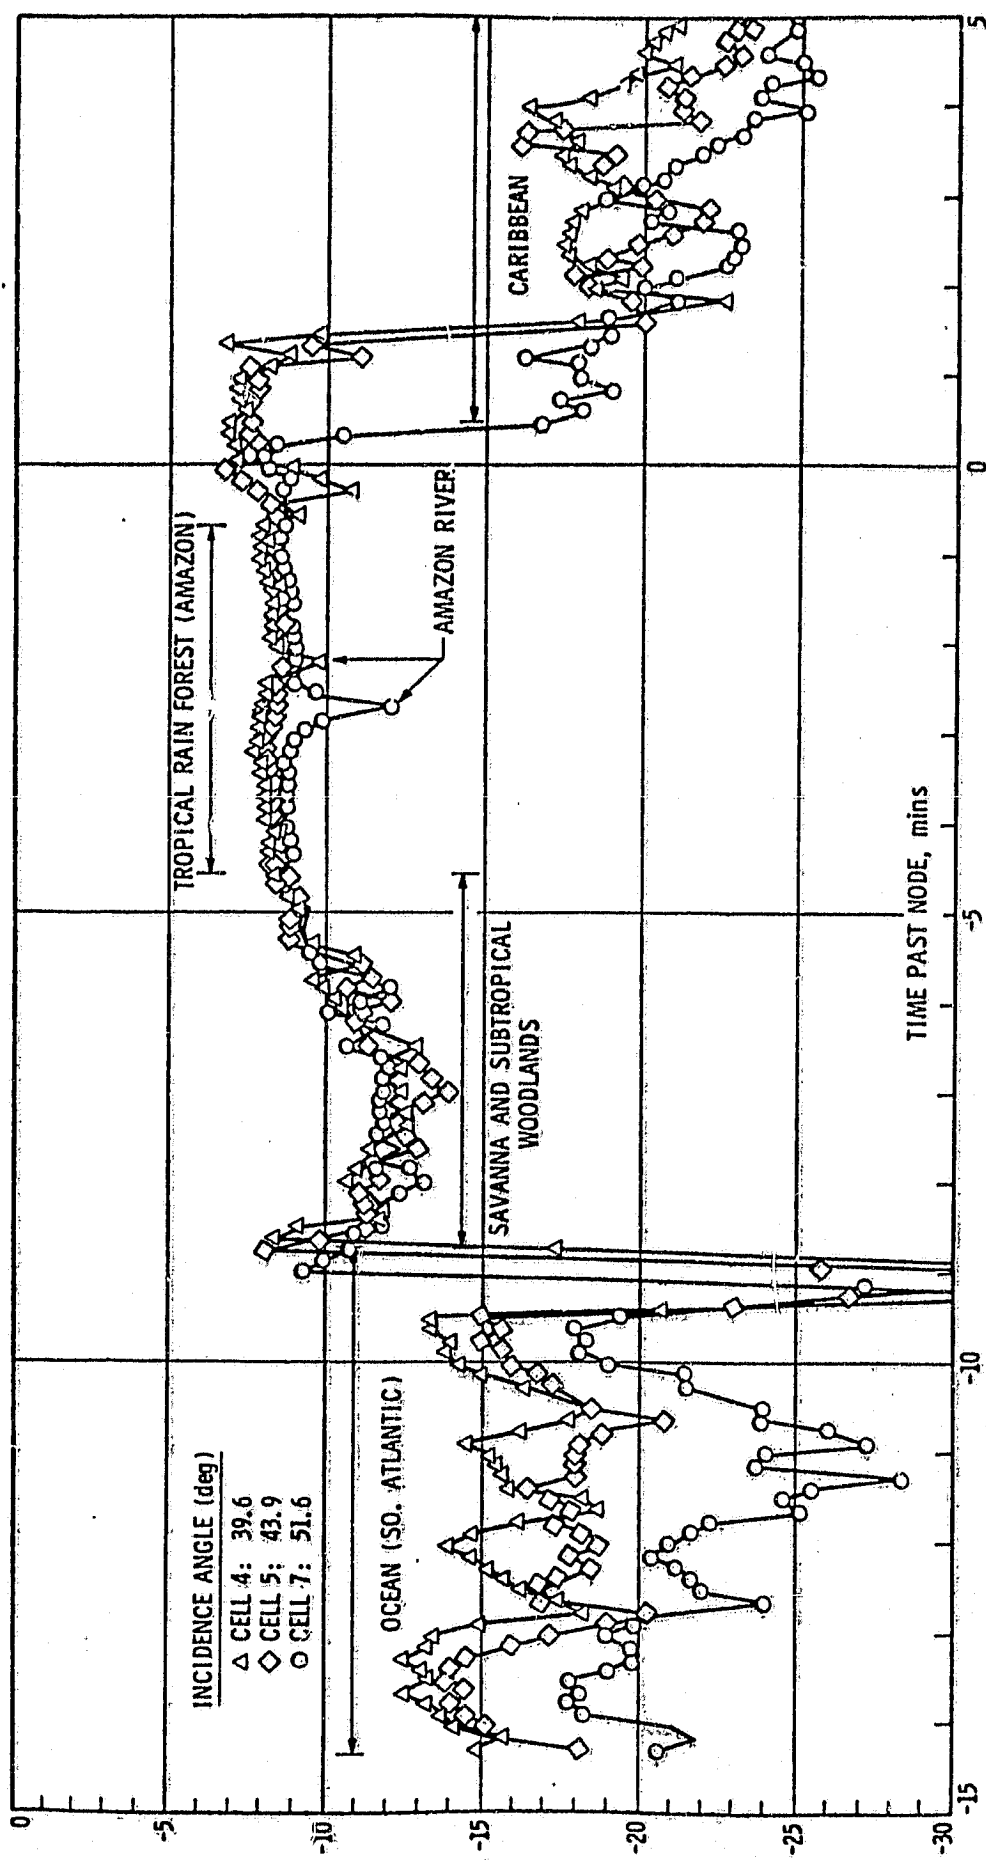


FIGURE 7:  $\sigma^0$  Time History for Rev 952; V-polarization; Cells 4,5,7

ORIGINAL PAGE IS  
OF POOR QUALITY

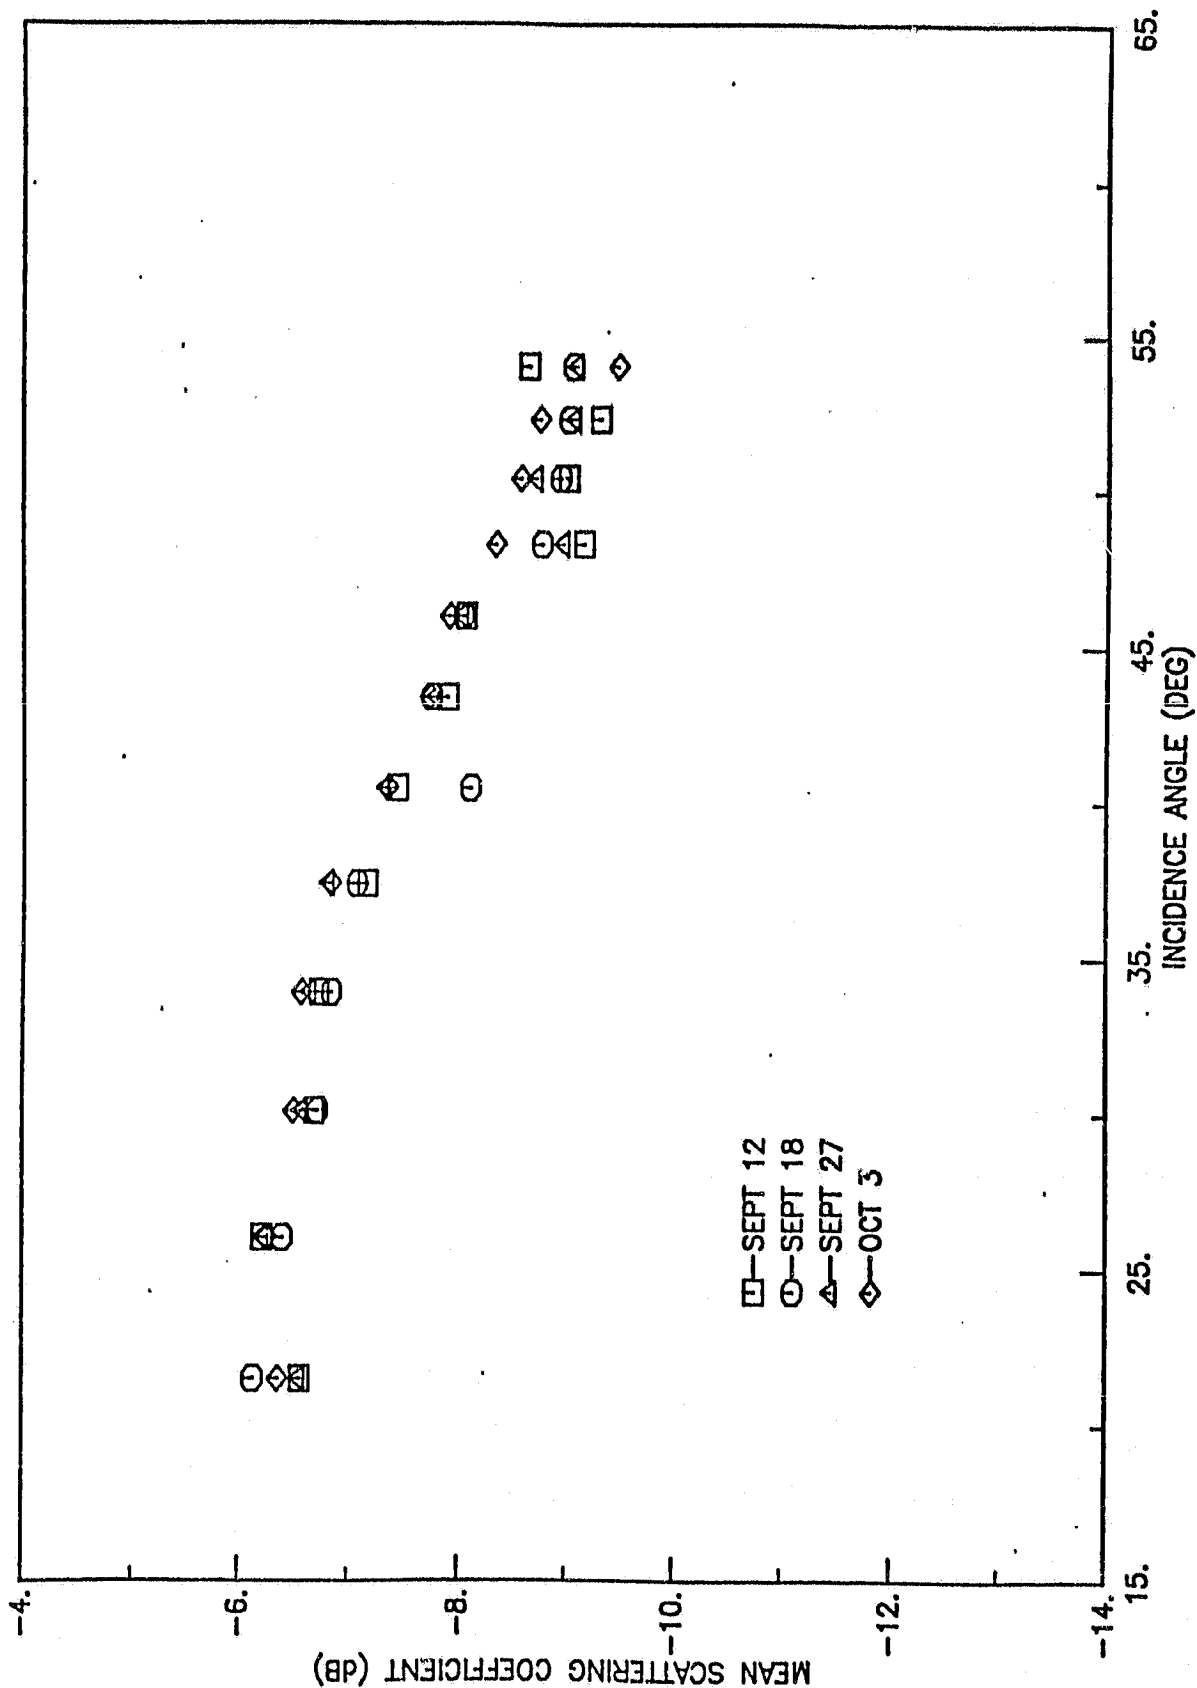


FIGURE 8: Target Stability During SEASAT Mission

#### 4.3 Incidence Angle Dependence and Diurnal Variation

The SASS made measurements over the Amazon rain forest twice daily. During the early part of the mission, the Brazil crossings were between 0500 and 0630 (local time at center of area) and between 1630 and 1830. During the last month of the SEASAT mission, the crossings took place between 0900 and 1200 and between 2100 and 2400. For the subsequent analyses the data were binned by polarization, beam, incidence angle and time of day. Mean values and standard deviations of  $\sigma^0$  were computed for each of these bins.

Plots and regressions of mean  $\sigma^0$  versus incidence angle were made for each beam to describe the small incidence-angle dependence observed in the time histories. The sample sizes for estimation of the means varied approximately from 10 to 100 measurements. Figure 9 shows the results for Beam 4, vertical polarization. The late-morning and nighttime data agree well. The results from Beams 1 and 2 indicate that the late-afternoon measurements were also consistent with the late-morning and nighttime data. On the other hand, the early-morning measurements were from 0.5 to 1.0 dB higher than data at the other times of day.

As can be clearly seen from Figure 9, the basic angular trend is adequately modeled by the equation

$$\sigma^0_{(dB)} = a\theta + b \quad (3)$$

where  $\theta$  is the incidence angle. Typical values for the incidence angle coefficient  $a$ , as determined from regression analysis, ranged from 0.077 to 0.159 dB/deg depending on beam and time of day.

ORIGINAL PAGE IS  
OF POOR QUALITY

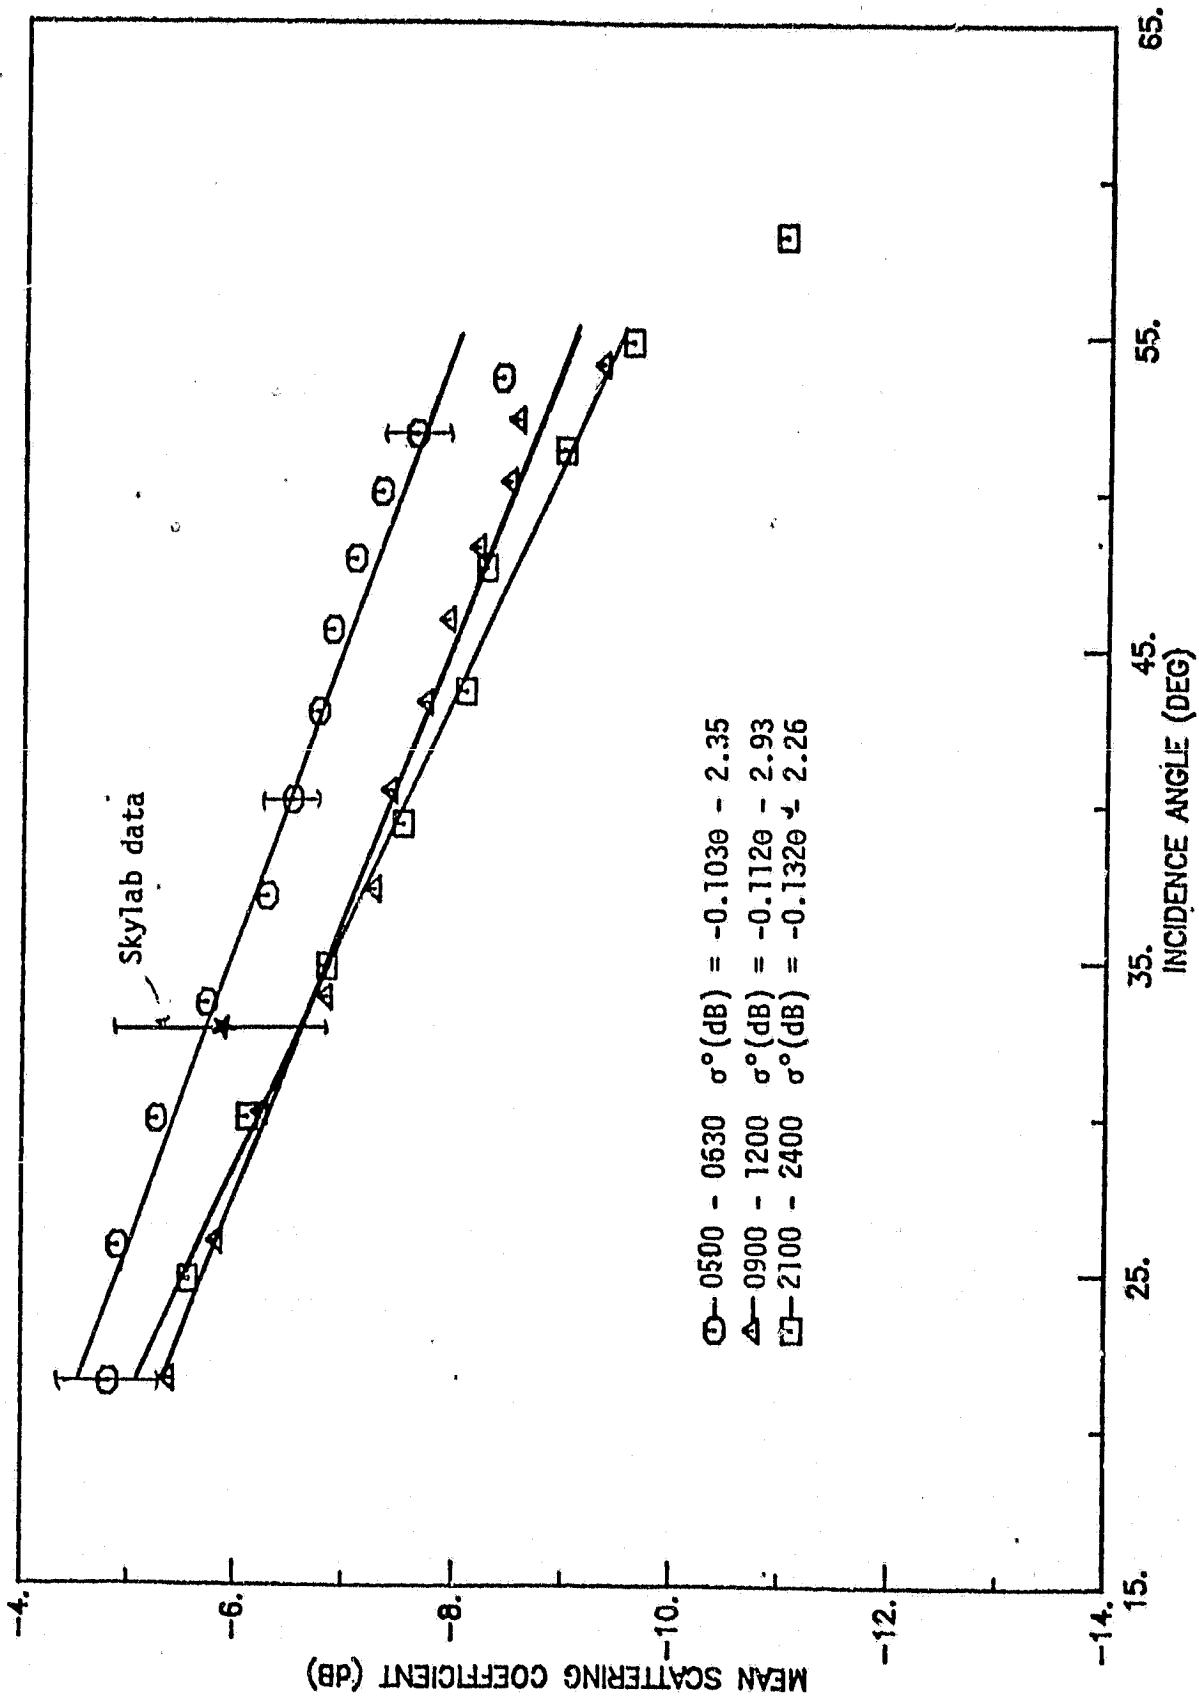


FIGURE 9: Mean  $\sigma^0$  vs Incidence Angle; Beam 4; V-polarization



Equation (3) may be rewritten as

$$\sigma_{\text{(real)}}^0 = K e^{-\theta/\theta_0} \quad (4)$$

where:

$$K = e^{\frac{b}{10} \ln 10}$$

$$\theta_0 = -\frac{10}{a \ln 10}$$

Table 2 gives a complete summary of the values of  $a$ ,  $b$ ,  $K$ ,  $\theta_0$  determined by regression using (3)\*. From the summary in Table 2 some obvious differences are observed between beams. The data appear to be most consistent in the incidence angle range of  $30^\circ - 50^\circ$ . The four SASS antennas had been cross-calibrated using the eleven Brazil passes available to NASA Langley scientists soon after the SEASAT mission [4]. Good agreement was achieved in the mid-angular range. The remaining differences highlight the need for the more sophisticated cross-calibration algorithm (using all of the SEASAT passes) developed here.

The value of  $\sigma^0$  estimated from the regression fit agrees well with the reported SKYLAB results. The SASS, however, shows much less deviation about the mean. Bars have been drawn on Figure 9 to show the scatter in the measurements. At incidence angles near the nominal pointing angle of  $44^\circ$ , the standard deviations ranged from 0.1 to 0.2 dB. At the extremes of the incidence angle range the standard deviations ranged from 0.3 to 0.6 dB. This

---

\* Both unweighted regressions and regressions weighted by number of cases were tried. Weighted regression results are reported here because they take into account the higher density of measurements in the angular region of greatest measurement accuracy. In most cases the differences in the "a" coefficients between the weighted and unweighted regression were within the errors of the estimated coefficients.

TABLE 2  
Regression Parameters for the  
Incidence Angle Response of SASS Data over Brazil

Model:  $\sigma^0_{(dB)} = a\theta + b$

$\sigma^0(\text{real}) = K e^{-\theta/\theta_0}$ , where K,  $\theta_0$  are determined from a, b.

Beam #	Time of day*	a	b	$R^2 \times 100\%$	K	$\theta_0$	Data points per regression
1	1	-0.129	-1.75	98	0.669	33.67	72
	2	-0.158	-1.71	99	0.764	27.41	246
	3	-0.112	-2.85	96	0.519	38.68	543
	4	-0.096	-3.69	94	0.428	45.30	551
2	1	-0.077	-3.62	96	0.435	56.31	166
	2	-0.089	-4.08	92	0.391	49.00	518
	3	-0.135	-1.98	98	0.663	32.17	442
	4	-0.155	-1.11	97	0.774	28.09	437
3	1	-0.148	-0.58	93	0.874	29.30	103
	2	-0.156	-1.15	96	0.767	27.91	603
	3+	-----	-----	--	-----	-----	---
	4	-0.078	-4.37	96	0.366	55.61	836
4	1	-0.103	-2.35	97	0.582	42.29	140
	2	-0.112	-2.93	97	0.510	38.65	589
	3+	-----	-----	--	-----	-----	---
	4	-0.132	-2.26	99	0.595	32.95	538

\*Time Code: 1 = 0500-0630  
2 = 0900-1200  
3 = 1630-1830  
4 = 2100-2400

+No data available

%Squared multiple correlation coefficient

Increase in the standard deviation is probably due to a decrease in measurement precision caused by weaker signals at angles well away from the peak antenna gain, and also may be caused by small beam-pointing-angle errors that have more importance where the antenna gain varies more rapidly with angle.

The regression equations determined from the data were used to estimate values of  $\sigma^0$  at  $40^\circ$  incidence angle which are plotted in Figure 10 as a function of time of day for Beam 2. The early morning return is 0.6 - 0.9 dB higher than at the other times of day. Table 3 summarizes these estimates for all of the beams. When this effect was first noted in the original analysis of the first 11 passes, all of the data had been screened using GOES imagery to eliminate cases containing significant cloud cover. In the present analysis the data were not screened. However, since this was the dry season few of the measurements should have been corrupted.

Initially it was believed that, because of the random orientation of the scatterers in the uniformly vegetated rain forest, the values of  $\sigma^0$  would be insensitive to polarization. While most of the measurements were vertically polarized, enough horizontal polarization data were taken to allow a comparison. On Figure 11 are plots of both V-pol and H-pol data for Beam 1. As expected the results appear to be insensitive to polarization.

No noticeable azimuthal-angle variation was observed in the rain-forest data. This isotropy can be demonstrated by comparing the 0900 - 1200 V-pol data from Beam 2 and Beam 4. While the beams differ  $180^\circ$  in azimuth, the measurements show agreement within 0.1 - 0.2 dB. This may be seen by overlaying Figures 9 and 11.

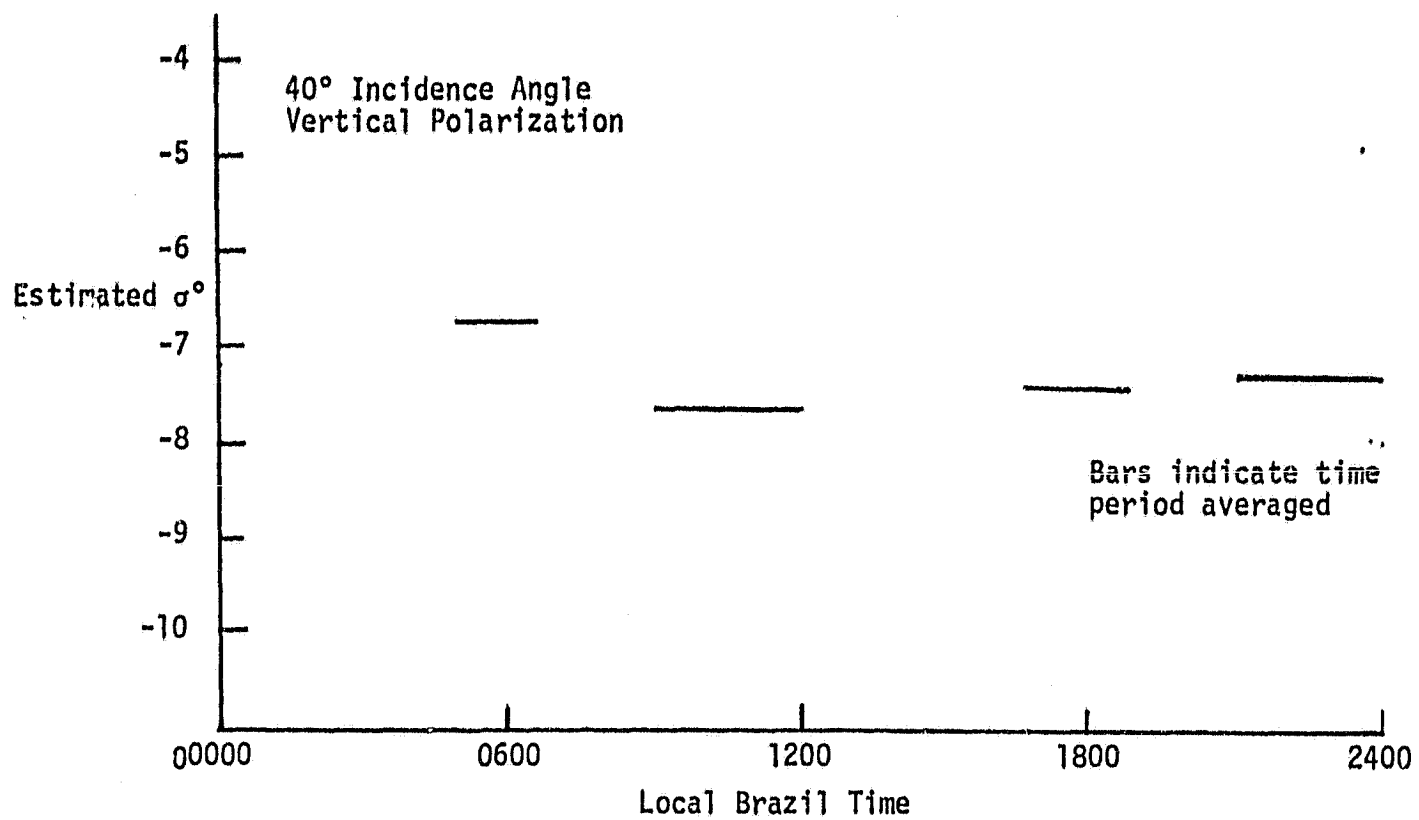


FIGURE 10: Estimated  $\sigma^0$  From Regression Fit

ORIGINAL PAGE IS  
OF POOR QUALITY

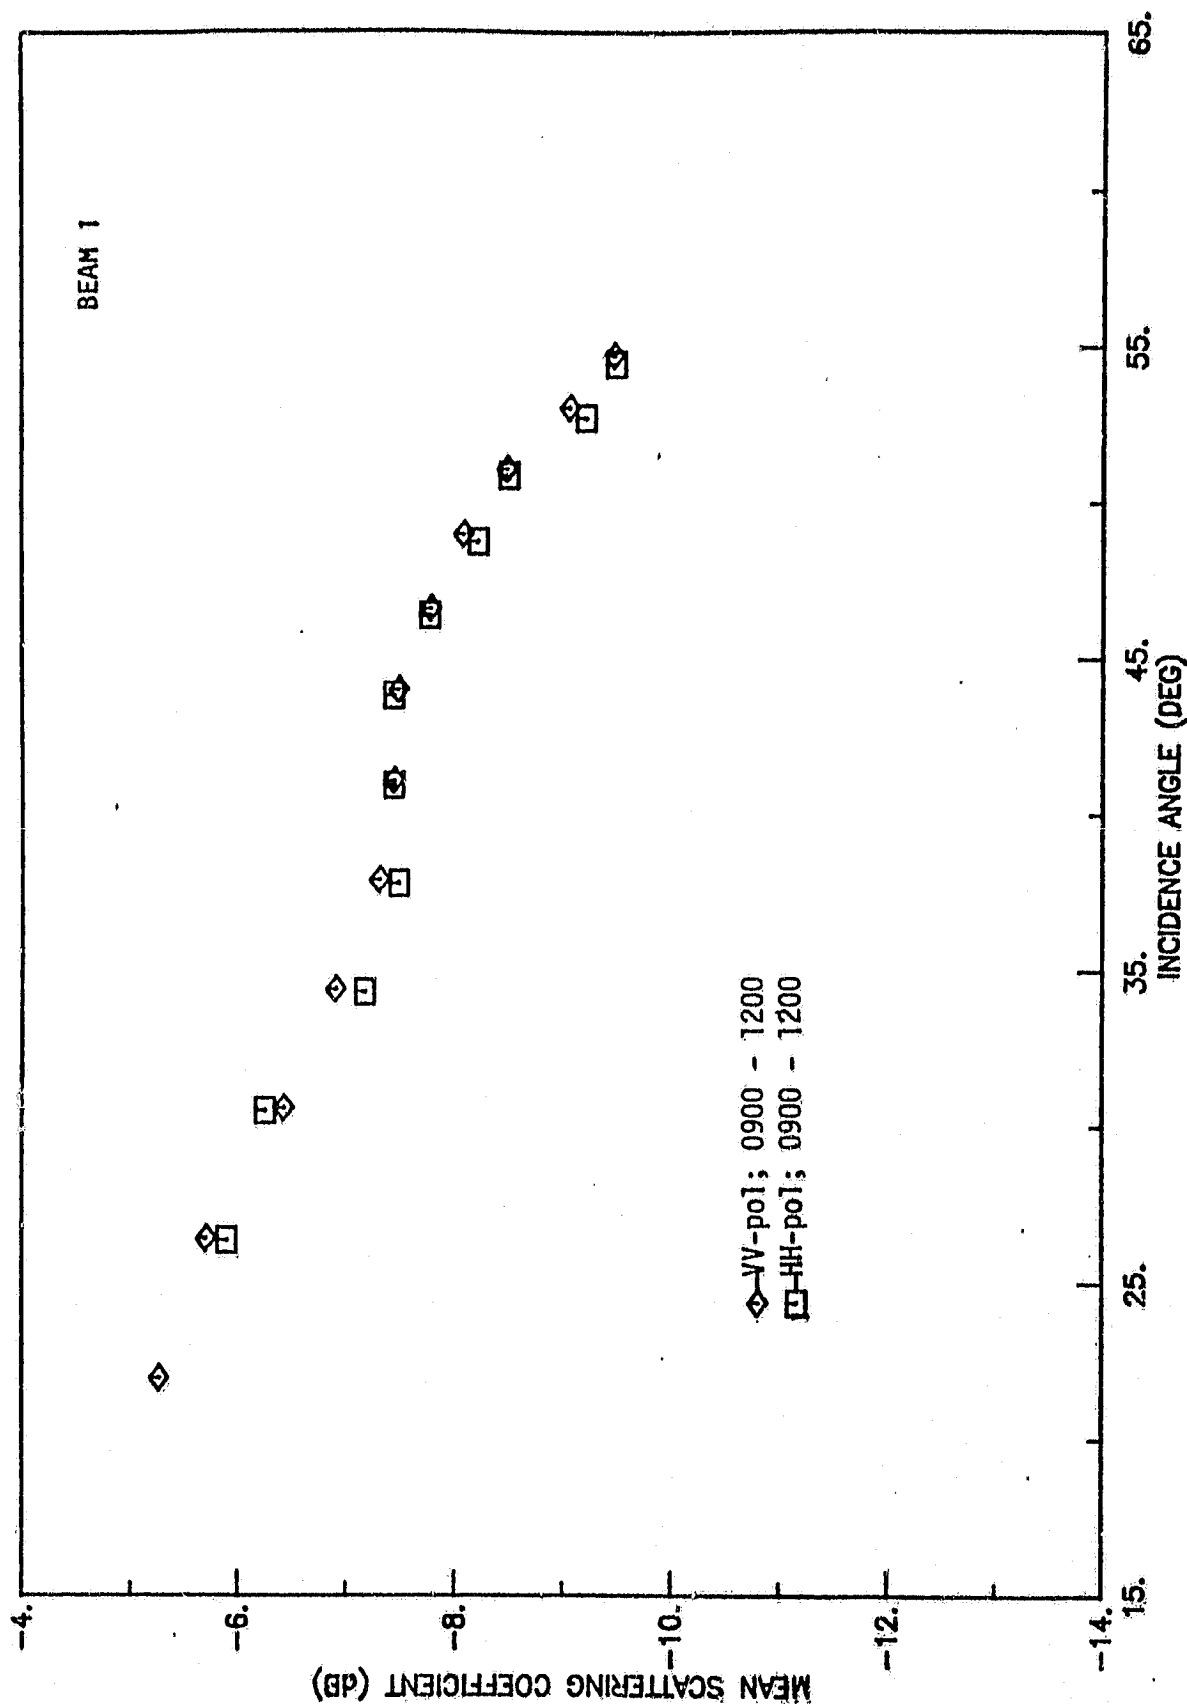


FIGURE 11: Comparison of WV-pol and HH-pol Data, Beam 1

-25-

TABLE 3  
Summary of Diurnal Effect at 40° Incidence Angle  
Vertical Polarization

Time of Day	ESTIMATED SCATTERING COEFFICIENT (dB)				Average for All Beams
	Beam 1	Beam 2	Beam 3	Beam 4	
0500 - 0630	-6.91	-6.70	-6.34	-6.47	-6.60
0900 - 1200	-7.49	-7.62	-7.39	-7.41	-7.48
1630 - 1830	-7.33	-7.40	-----	-----	-7.36
2100 - 2400	-7.53	-7.31	-7.49	-7.54	-7.47

#### 4.4 SEASAT Summary

The data obtained from SEASAT-1 have shown the potential of the Amazon rain forest for use as a standard target. Since the diurnal effects appear to be limited to early morning, data from other times of day could all be used together to build a data base for calibration. The small scatter (0.1 - 0.6 dB) in the mean values of  $\sigma^0$  indicates the remarkable stability of this region and hence its usefulness as a standard target. A basic characterization of the incidence-angle dependence can be made using a simple straight-line model of  $\sigma^0_{\text{(dB)}}$  vs  $\theta$ .

The differences between the regression coefficients shown in Table 2 for the different beams cannot be due to actual  $\sigma^0$  differences because Beams 1 and 2 covered the same area, as did Beams 3 and 4. Hence these differences must be in antenna patterns or in pointing-angle differences. This points out the need for use of such a "standard target" in future multibeam scatterometers.

## 5.0 DEVELOPMENT OF OFF-NADIR ANTENNA BIAS CORRECTIONS FOR NOSS

### 5.1 Description of NOSS Scatterometer System


The NOSS Scatterometer System (SCATT) design is for a second generation fan-beam scatterometer using experience gained from SEASAT (Section 4.1). Figure 12 shows the proposed SCATT ground-track coverage. Besides the four beams used in SASS, two antennas are pointed at  $65^\circ$  from the satellite orbit plane to aid in wind-direction alias removal. All of the antennas are dual-polarized (V and H). The SCATT instrument transmits a 100-watt 14.0-GHz signal. The backscattered signal is Doppler filtered into 60 resolution cells with each cell approximately 10 km x 10 km. The off-nadir bias correction algorithm is to be applied to the outermost 50 Doppler cells of each beam.

### 5.2 Development of Maximum Likelihood (ML) Algorithms to Estimate Off-Nadir Bias Parameters

During SEASAT analysis, Brazilian rain-forest data were first used to correct for antenna biases in the off-nadir cells. Estimates for relative bias and pointing angle were determined by comparing data from a limited number of passes. For NOSS a formalized algorithm was desired to allow automation of the estimation of these parameters by using all available SCATT rain-forest data. The next subsection (5.2.1) describes in detail the derivation of a maximum likelihood (ML) approach to estimate relative bias and pointing angle.\* Once pointing angle is determined, a ML technique may be used periodically to re-estimate relative bias. This algorithm is described in Section 5.2.2.

---

\*This ML approach is an adaptation of the approach used in the SEASAT Wind Vector Algorithm developed by F.J. Wentz (Remote Sensing Systems, Inc.).





### 5.2.1 Relative Bias and Pointing Angle Estimation

For an operational system the radar parameters,  $P_T$  and  $G_0$  in equations (1) and (2) are specified in the design and carefully measured prior to launch. The relative antenna gain,  $\frac{G}{G_0}$ , is determined from pre-launch antenna pattern measurements and the specified pointing angle,  $\theta_p$ . Although  $P_T$  is monitored during operation, only relative changes in  $P_T$  can be measured. The true absolute value of  $P_T$  depends on pre-launch calibrations. However, as was observed with the SASS, the actual values for  $P_T$ ,  $G_0$  and  $\theta_p$  after launch can differ from the design values due to errors in the pre-launch calibrations [4].

Effects of these differences at each Doppler cell can be seen by writing equation (1) for both the designed and actual values of  $P_T$ ,  $G_0$ ,  $\theta_p$  and the corresponding  $\sigma^0$  inferred from equation (2). For a given Doppler cell (incidence angle):

$$P_R = \frac{P_{DT}^2 \lambda^2 G_D^2 [G/G_0(\theta_{DP})]^2 \sigma_D^0 A}{(4\pi)^3 R^4}$$

where the subscript D refers to the designed values.

$$P_R = \frac{P_{AT}^2 \lambda^2 G_A^2 [G/G_0(\theta_{AP})]^2 \sigma_A^0 A}{(4\pi)^3 R^4}$$

where the subscript A refers to actual values.

Equating the above expressions and solving for  $\sigma_D^0$  in terms of  $\sigma_A^0$  yields

$$\sigma_D^0 = \frac{\alpha [G/G_0(\theta_{AP})]^2 \sigma_A^0}{[G/G_0(\theta_{DP})]^2} \quad (5)$$

$$\text{where } \alpha \triangleq \text{relative bias} = \frac{P_{AT} G_A^2}{P_{DT} G_D^2}$$

By substituting a standard reference target,  $\sigma_S^0$  at the cell incidence angle, for the value of  $\sigma_A^0$ , the relationship in equation (5) can be used to estimate the relative bias,  $\alpha$ , and the actual pointing angle  $\theta_{Ap}$ . Since the measurements,  $\sigma_D^0$ , are noisy, maximum-likelihood estimation is used to determine  $\alpha$  and  $\theta_{Ap}$ .

Formulation of the maximum-likelihood estimation may be given as: a vector of noisy observations,  $\underline{z}$ , exists which depends probabilistically on a parameter of interest,  $B$ . The M.L. estimate of  $B$  is then given by the condition

$$\left. f_{\underline{z}/B}(\underline{z}/B) \right|_{B = \hat{b}_{ML}(\underline{z})} = \text{maximum} \quad (6)$$

where:

$f_{\underline{z}/B}$  is the joint conditional probability density function.

$\hat{b}_{ML}(\underline{z})$  is the maximum-likelihood estimate of  $B$ .

This approach can be applied to estimate  $\alpha$  and  $\theta_{Ap}$  with the following assumptions:

- (1) Radar measurements are independent and may be described as a Gaussian process
- (2) The noisy observations,  $\underline{z}$ , are the parameter  $\sigma_D^0$
- (3) The parameter of interest,  $B$ , is given by the relation:

$$\frac{\alpha [G/G_0(\theta_{Ap})]^2}{[G/G_0(\theta_{Dp})]^2} \sigma_S^0 = B(\alpha, \theta_{Ap})$$

- (4)  $G/G_0(\theta_p)$  is known from pre-launch measurements.

Applying the above conditions, the conditional probability in expression (6) may be re-written as:

$$f_{\sigma_D^0/B} [\{\sigma_D^0; \ell = 1, N\} / B(\alpha, \theta_{Ap})] = \frac{\prod_{\ell=1}^N e^{-[\sigma_D^0 - B(\alpha, \theta_{Ap})]^2 / 2(\Delta\sigma_D^0)^2}}{\eta} \quad (7)$$

where:

$$\eta = \prod_{\ell=1}^N \sqrt{2\pi(\Delta\sigma_D^0)^2}$$

$N$  = number of measurements

$\Delta\sigma_D^0$  = standard deviation of the measurements.

Since the purpose is to select values of  $\hat{\alpha}, \hat{\theta}_{Ap}$  that maximize expression (7), several simplifications can be made. The quantity,  $\eta$ , may be ignored since it is not a function of the parameters  $\alpha, \theta_{Ap}$ . The quantity  $\Delta\sigma_D^0$  is assumed to be constant since any changes in the standard deviation of the backscatter measurement as a function of ground track over the rain forest appear to be small. Lastly, the logarithm of the likelihood function may be maximized, since the same values  $\hat{\alpha}, \hat{\theta}_p$  will maximize both the likelihood function and the log-likelihood function. Therefore, the condition to satisfy is:

$$-1/2 \sum_{\ell=1}^N (\sigma_D^0 - B)^2 = \max \quad (8)$$

where  $B = B(\alpha, \theta_{Ap})$ .

Since the function  $\hat{G}/\hat{G}_0(\theta_p)$  is stored as a look-up table and very difficult to express analytically, the log-likelihood expression in (8) is maximized in two steps. First a migrating search is performed to approximately center a  $3 \times 3$  matrix about the solution. Then the maximum of a bivariate interpolating polynomial fit to points on this matrix is found to obtain  $\hat{\alpha}, \hat{\theta}_p$ .

The search is done by defining a log-likelihood matrix,  $g_{i,j}$ , as follows:

$$g_{i,j} = -1/2 \sum_{\ell=1}^N [\sigma_{\ell}^0 - B(\alpha_i, \theta_{jp})]^2 \quad (9)$$

where:

$$\begin{aligned} \alpha_i &= \alpha_0 + i\Delta\alpha; i = -1, 0, 1 \\ \theta_{jp} &= \theta_{op} + j\Delta\theta_p; j = -1, 0, 1 \end{aligned}$$

Since the actual values for  $P_T$  and  $G_0$  should be reasonably close to the design specifications, initially  $\alpha_0$  is chosen to be 1.0. Similarly, the design-specified pointing angle,  $\theta_{op}$ , is chosen for the initial value of  $\theta_{op}$ . Reasonable values for  $\Delta\alpha, \Delta\theta_p$  appear to be 0.2 and 1.0 respectively. The values for  $g_{i,j}$  are then compared to find the maximum. If the center point,  $g_{0,0}$ , is not the maximum, a new matrix is formed as follows:

$$\begin{aligned} \alpha_i &= \alpha_{\max} + i \Delta\alpha; i = -1, 0, 1 \\ \theta_{jp} &= \theta_{p_{\max}} + j \Delta\theta_p; j = -1, 0, 1 \end{aligned}$$

where:

$\alpha_{\max}, \theta_{p_{\max}}$  are the  $\alpha_i, \theta_{jp}$  corresponding to the maximum of the previous matrix.

Searching continues until a matrix is formed which has the maximum at the center.

Estimates for relative bias,  $\hat{\alpha}$ , and actual pointing angle,  $\hat{\theta}_p$ , are found by fitting a bi-variate, quadratic interpolating polynomial to the values of  $g_{i,j}$ . Values of  $\hat{\alpha}$  and  $\hat{\theta}_p$  which maximize the polynomial are then determined analytically. The interpolating polynomial is of the form:

$$g(\hat{\alpha}, \hat{\theta}_p) = a\beta^2 + b\beta + c\gamma^2 + d\gamma + e\beta\gamma + f \quad (10)$$

where:

$$\begin{aligned} \beta &= (\alpha - \alpha_0) / \Delta\alpha \\ \gamma &= (\theta_p - \theta_{op}) / \Delta\theta_p \end{aligned}$$

$$a = \frac{g_{1,0}}{2} - g_{0,0} + \frac{g_{1,0}}{2}$$

$$b = \frac{-g_{1,0}}{2} + \frac{g_{1,0}}{2}$$

$$c = \frac{g_{0,-1}}{2} - g_{0,0} + \frac{g_{0,1}}{2}$$

$$d = \frac{-g_{0,-1}}{2} + \frac{g_{0,1}}{2}$$

$$e = g_{0,0} - g_{1,0} - g_{0,1} + g_{1,1}$$

$$f = g_{0,0}$$

where  $g_{i,j}$  are the values of the likelihood matrix.

The maximum is found by taking the partial derivatives of the interpolating polynomial and setting them equal to zero. When the resultant equations are solved for  $\hat{\alpha}$  and  $\hat{\theta}_p$  we get

$$\hat{\alpha}_{ML} = \alpha_0 + \frac{\Delta\alpha(ed - 2bc)}{4ac - e^2} \quad (11a)$$

$$\hat{\theta}_{PML} = \theta_{p0} + \frac{\Delta\theta_p(be - 2ad)}{4ac - e^2} \quad (11b)$$

where a,b,c,d,e are defined as above.

Final estimates for  $\hat{\alpha}$  and  $\hat{\theta}_p$  are made by averaging the values of  $\hat{\alpha}_{ML}$  and  $\hat{\theta}_{PML}$  obtained for each Doppler cell.

### 5.2.2 Long-Term Monitoring of Relative Bias

Periodic estimates of the relative bias during the mission will provide a means to correct for long-term drifts in transmitter power. If the pointing angle is not expected to change once  $\hat{\theta}_p$  is determined, a simplified version of the algorithm in Section 5.2.1 may be used to estimate relative bias.

In this case the parameter of interest contains only one unknown, the relative bias  $\alpha$ . The same procedure followed in Section 5.2.1 is used to solve this one-parameter case with a likelihood vector,  $g_i$ , replacing the matrix  $g_{i,j}$ . The vector is defined as:

$$g_i = -\frac{1}{2} \sum_{\ell=1}^N [\sigma_{\ell D}^0 - \alpha_i \sigma_S^0]^2; i = -1, 0, 1 \quad (12)$$

where:

$\sigma_{\ell D}^0$  = the NOSS SCATT measurement

$\sigma_S^0$  = the standard target

$\alpha_i = \alpha_0 + i\Delta\alpha$

$\alpha_0$  = previously determined relative bias

Vector  $g_i$  is then fitted with a quadratic interpolating polynomial of the form:

$$g(\hat{\alpha}) = r\beta^2 + s\beta + t \quad (13)$$

where:

$$\beta = \frac{(\hat{\alpha} - \alpha_0)}{\Delta\alpha}$$

$$r = \frac{g_{-1}}{2} - g_0 + \frac{g_1}{2}$$

$$s = -\frac{g_{-1}}{2} + \frac{g_1}{2}$$

$$t = g_0$$

$g_i$  = the values of the vector calculated in equation (12).

By differentiating equation (13) and setting the result equal to zero, the maximum likelihood value of  $\hat{\alpha}$  is found as:

$$\hat{\alpha}_{ML} = \alpha_0 - \frac{s\Delta\alpha}{2r} = \alpha_0 - \Delta\alpha \left( \frac{g_1 - g_{-1}}{g_{-1} - 2g_0 + g_1} \right)$$

A final estimate of  $\hat{\alpha}$  may be determined by averaging the estimates of  $\hat{\alpha}_{ML}$  obtained for each Doppler cell.

### 5.3 Implementation of Off-Nadir Bias Algorithm for NOSS SCATT

The flow chart in Figure 13 shows the relationship between the off-nadir bias algorithm and SCATT data processing. Earth-located  $\sigma^0$  data are screened to locate data over the Amazon rain forest. Then the Amazon map described in Section 3.0 is used to remove measurements that include either the Amazon river or one of its principal tributaries. Remaining rain-forest data are then supplied to the off-nadir bias algorithm.

Actual estimates of the relative bias and pointing angle are performed off-line from the main SCATT processing. This is necessary for two reasons: first, Brazil passes for several days are needed to create a sufficient data base for estimation; second, considerable human interaction and evaluation is needed to interpret the results.

Figure 14 shows a flow chart of the processing required in the off-nadir bias algorithm. Inputs to the algorithms are the SCATT  $\sigma^0$  data from the rain forest and the corresponding brightness temperatures  $T_B$  measured by the Large Antenna Multichannel Microwave Radiometer (LAMMR). Co-located LAMMR data are used to flag and remove potential rain-corrupted SCATT measurements. A data base is then created for use with the maximum-likelihood procedure described in Section 5.2. Estimates for relative bias and antenna pointing angle are computed for every combination of beam, cell and polarization. Approximate error bounds are determined using the results of several estimations. The following subsections describe in more detail the processing required.

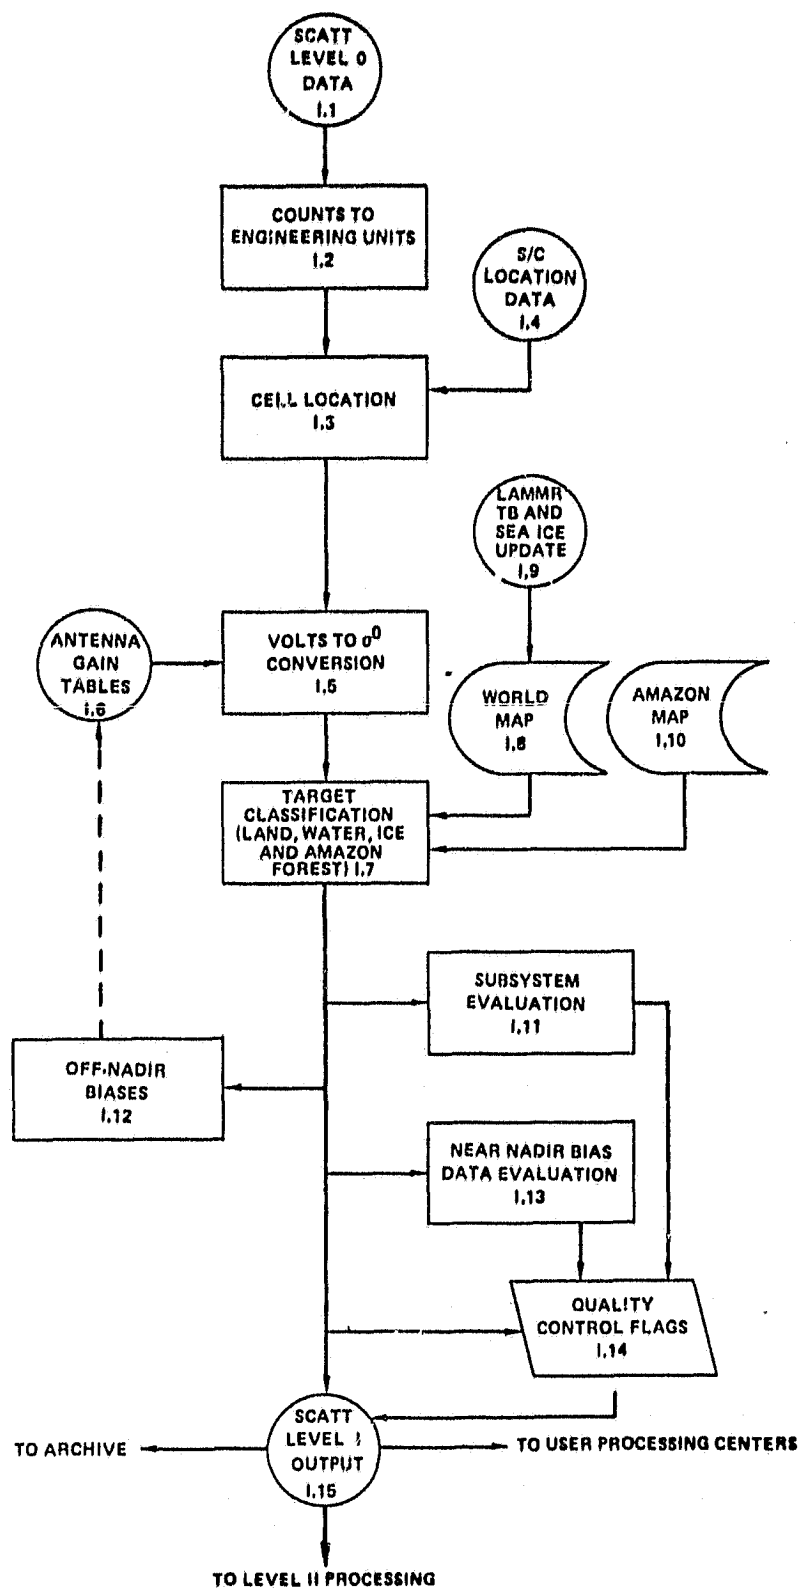


FIGURE 13: Proposed Processing of NOSS Scatterometer (SCATT) Data to Obtain  $\sigma^0$



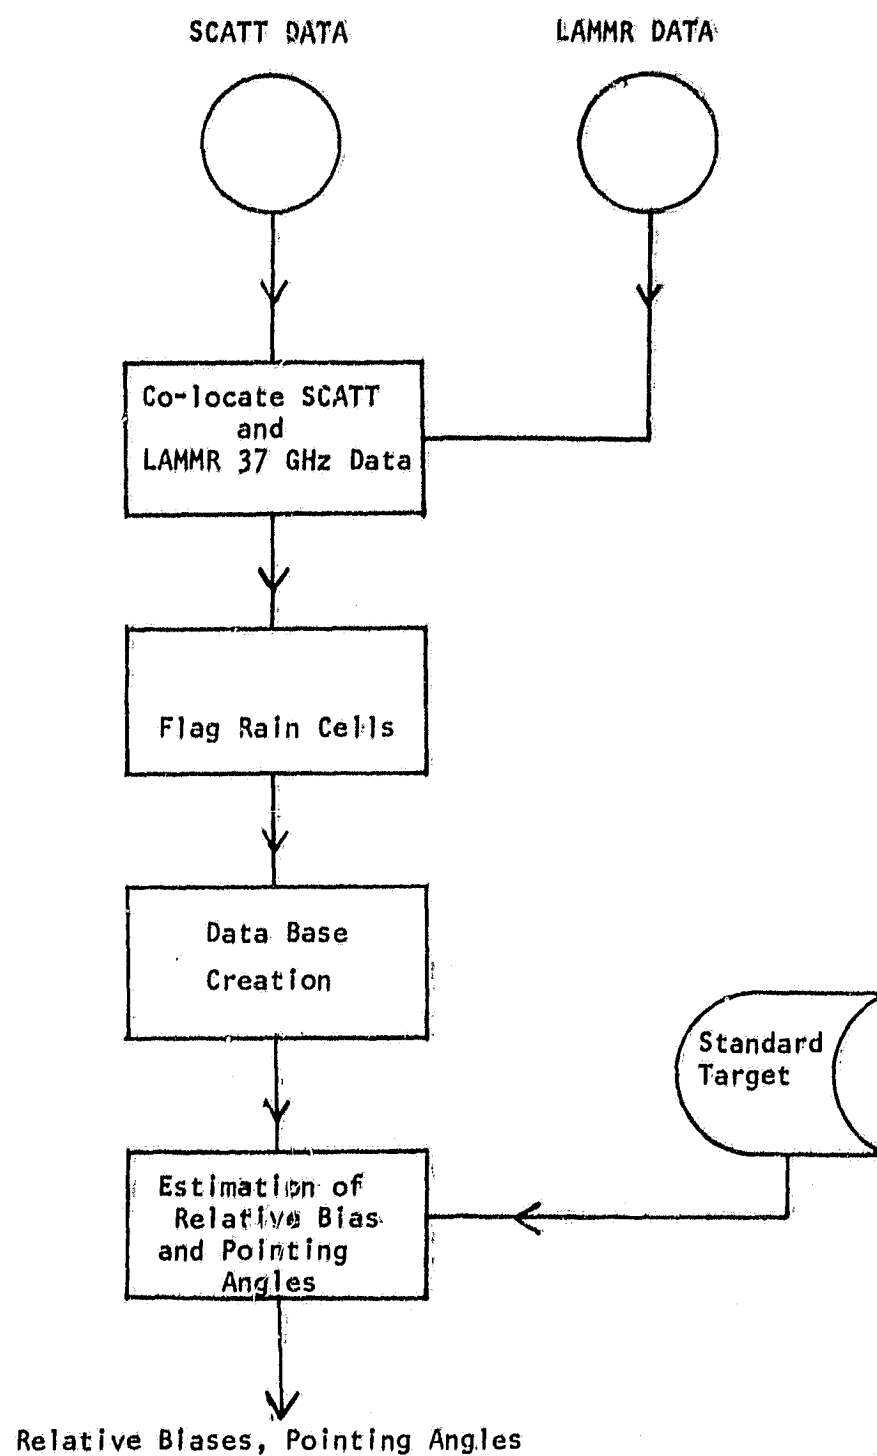


FIGURE 14: Processing Required for Off-Nadir Bias Correction

### 5.3.1 Co-Location of SCATT and LAMMR

To use LAMMR 37 GHz data to flag rain-corrupted SCATT measurements,  $T_B$  measurements must be co-located with individual SCATT  $\sigma^0$  measurements. The input data streams for both SCATT and LAMMR are assumed to be gridded into 50 km blocks and assigned a set of coordinates  $(i,j)$ . Co-location is accomplished by: first, sorting both LAMMR  $T_B$ 's and SCATT  $\sigma^0$ 's independently by grid coordinates; second, for each coordinate pair  $(i,j)$  containing SCATT data the corresponding LAMMR grid point is located. Within the 50 km grid each SCATT cell is matched with the closest LAMMR cell.

### 5.3.2 Flagging Rain Cells

Co-located LAMMR 37 GHz  $T_B$ 's are used to flag potential rain-corrupted SCATT cells. The brightness temperature of the Brazilian rain forest is very high due to high emissivity and surface temperature. However, in the presence of rain only the top portion of the rain cloud and not the forest is seen. Hence it is believed that the temperature measured should be lower when rain occurs than in clear sky conditions. Rain flags will be set whenever the measured temperature falls below a fixed cut-off temperature,  $T_{cut}$ .

Figure 15 shows the form of the 37 GHz brightness temperature histogram expected from the Amazon rain forest. The lobe at the lower brightness temperature corresponds to measurements made in rain conditions, while the lobe at higher brightness temperature corresponds to clear-sky conditions. A preliminary value for  $T_{cut}$  may possibly be made from SEASAT radiometer measurements. However, it will be important to make a number of histograms with LAMMR data to confirm the assumed distribution shown in Figure 15 and to properly set  $T_{cut}$ .

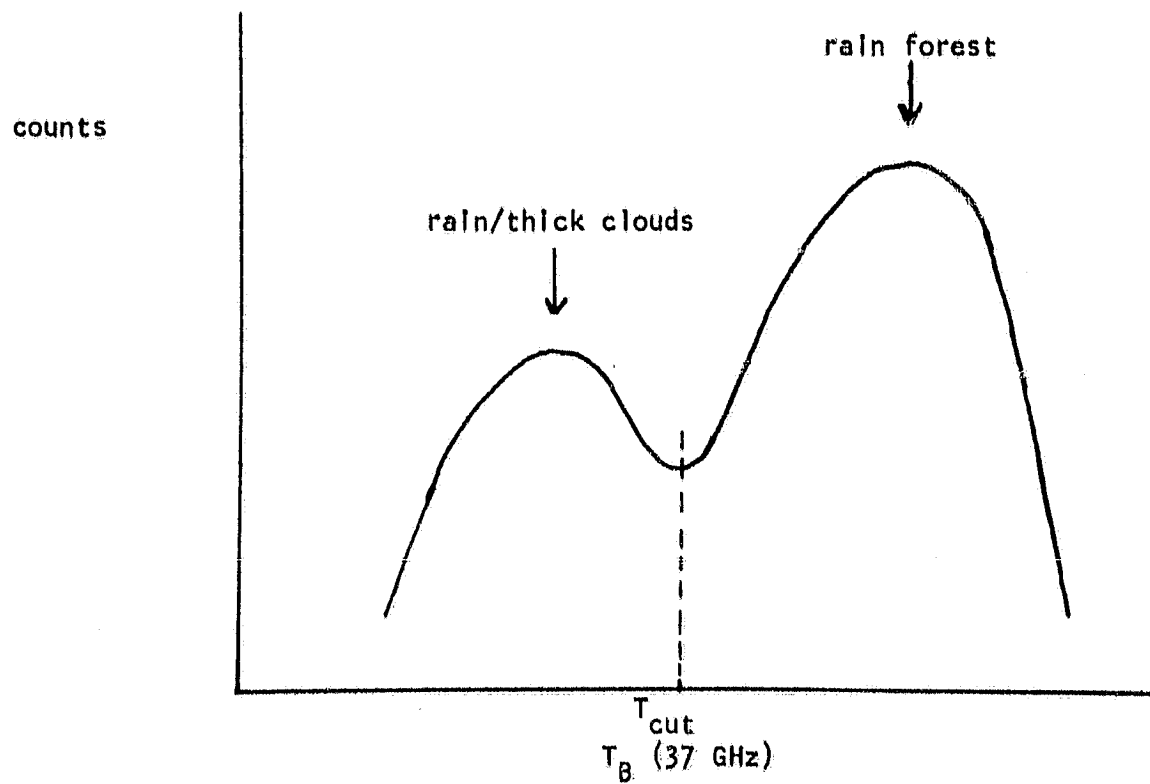


FIGURE 15: Nature of Expected Amazon  $T_B$  Distribution

### 5.3.3 Data Base Creation

Due to the large volume of data produced by the SCATT, estimation of relative bias and pointing angle is performed by using mean  $\sigma^0$  values computed for each pass over Brazil. Individual clear-sky SCATT measurements are grouped by beam, cell number and polarization. At the end of each Brazil pass the mean value, standard deviation, and average incidence angle is computed for each group containing more than twenty measurements. These estimates are also binned by beam, cell number and polarization. Estimation of relative bias and pointing angle takes place when each mean value bin has data from at least 10 passes. Since the bins will fill at different rates depending on the location of the satellite subtrack, provision is made to store up to 20 values in each.

### 5.3.4 Standard Target Creation

The maximum likelihood procedure described in Section 5.2 requires a standard target,  $\sigma_S^0(\theta)$ , defined over the entire off-nadir incidence angle range. Determination of  $\sigma_S^0$  will require consistent human evaluation and decision.

Initially plots and regressions of the mean value of  $\sigma^0$  versus incidence angle will be made from the data base described above. These plots and regressions will be compared with SEASAT results described in Section 4.0 and Appendix B. If there is good comparison in trend, the SEASAT model,  $\sigma_{dB}^0 = a\theta + b$ , will be adopted with an appropriate level shift. If the trend of the SCATT data is significantly different, a new model determined from the analysis of several passes may be used. The final procedure used in creating the standard target will be determined once the initial comparisons are made.

### 5.3.5 Relative Bias and Pointing Angle Estimation

Early in a future mission with the NOSS design will be the implementation of the ML technique to determine both relative bias and pointing angle described in Section 5.2.2. Once a suitable value for pointing angle is determined for each beam, the simplified algorithm described in Section 5.2.3 may be used to monitor long-range transmitter drift. Both of these algorithms can be implemented using the same inputs so switching between algorithms should be trivial.

In this implementation the noisy data,  $\sigma_{\ell D}^0$  in equations (8) and (12) are the mean values stored in the data base (Section 5.3.3). Separate estimates will be made for each combination of beam, cell and polarization. Repeated estimates should be made using subsequent data. Final estimates and bounds may be calculated by computing the means and standard deviations.

## 6.0 CONCLUSIONS AND FUTURE RESEARCH

Detailed analysis of SEASAT scatterometer data has confirmed the suitability of the Amazon rain forest for use as a standard calibration target. A simple straight line model for incidence angle variation appears to be quite adequate. Useful approximations for the model parameters may be determined from the SASS data. The accuracy of these approximations is limited by remaining biases between SASS antennas and the lack of independent rain-forest measurements for absolute calibration.

Maximum-likelihood estimation algorithms have been developed to correct off-nadir antenna biases for spaceborne scatterometers by utilizing rain-forest data. Application of those algorithms for the proposed NOSS scatterometer was straight-forward. Presumably these techniques could be adapted easily for calibrating other future systems.

Three important areas of research need to be undertaken to extend the usefulness of Amazon rain forest data to correct off-nadir antenna biases. First, measurements must be made throughout the year to determine the existence of any seasonal effects. The SEASAT measurements were made during only the dry season. Second, research needs to be done to confirm the proposed algorithm to screen out data corrupted by thick clouds and rain. The multifrequency radiometer measurements made with the NIMBUS 7 satellite could potentially contribute valuable information in both of these areas. Third, a calibration program using aircraft overflights is needed to better determine the absolute value of  $\sigma^0$ .

#### REFERENCES

- [1] Sobti, A., R.K. Moore and S.T. Ulaby, "Backscatter Response at 13.9 GHz for Major Terrain Types As Seen From Orbit," Remote Sensing Laboratory Technical Report 243-4, August 1975. University of Kansas Center for Research, Inc., Lawrence, Kansas 66045.
- [2] Sobti, A. and E.C. Davidson, "Microwave Scattering Measurements Over Brazil at 13.9 GHz," Remote Sensing Laboratory Technical Report 243-11, September 1975. University of Kansas Center for Research, Inc., Lawrence, Kansas 66045.
- [3] Grantham, W.L., E.M. Bracalente, W.L. Jones, J.H. Shrader, L.C. Schroeder and J.L. Mitchell, "An Operational Satellite Scatterometer for Wind Vector Measurements over the Oceans," NASA TMX 72672, March 1975.
- [4] Bracalente, E.M., D.H. Boggs, W.L. Grantham and J.L. Sweet, "The SASS Scattering Coefficient  $\sigma^0$  Algorithm," IEEE Journal of Oceanic Engineering, vol. OE-5, no. 2, April 1980, pp. 145-149.

## APPENDIX A

A-1: Program Listing for Digitized Land/Water and Vegetation Maps . . .	43
A-2: Land/Water Tables. . . . .	46
A-3: Vegetation Tables. . . . .	55

```

CBRZLND          LAND/WATER ROUTINE FOR BRZILIAN RAIN FOREST
C
SUBROUTINE LDBRZL
C
PURPOSE
C
    THIS ROUTINE LOADS THE LAND WATERMAP
C
    INTEGER ARRAY(6,10,64),CODE
    REAL GLAT(6)/2.,0.,-2.,-4.,-6.,-8./
    REAL GLON(10)/74.,72.,70.,68.,66.,64.,
    & 62.,60.,58.,56./
    REAL LAT, LONG
C
    READ LAND/WATER MAP
C
    DO 10 I=1,6
    DO 10 J=1,10
    READ(01,900) (ARRAY(I,J,K),K=1,64)
    900 FORMAT(4X,8I8)
    10 CONTINUE
C
    RETURN
C
    ENTRY LNDH20(TLAT,TLONG, CODE)
C
PURPOSE
C
    THIS ROUTINE FETCHES A LAND/WATER CODE
    CORRESPONDING TO AN INPUT LATITUDE AND
    LONGITUDE
C
INPUT ARGUMENTS
C
    TLAT          *          LATITUDE (DEG)
    TLONG          *          EAST LONGITUDE (DEG)
C
OUTPUT ARGUMENT
C
    CODE          *          LAND/WATER CODE
    LAT = TLAT
    LONG = TLONG
C
    LONG = 360.0 - LONG
    ILAT = IFIX( (2.-LAT)/2. ) + 1
    JLON = IFIX( (74.-LONG)/2. ) + 1
    ITEP = IFIX( (GLAT(ILAT) - LAT)/0.25 )
    JTEP = IFIX( (GLON(JLON) - LONG)/0.25 ) + 1
    KELE = ITEP*8 + JTEP
    CODE = 1 + ARRAY(ILAT,JLON,KELE)
    RETURN
    END
BRZVEG          VEGETATION CODE ROUTINE FOR BRAZILAIN AREA

```



ORIGINAL PAGE IS  
OF POOR QUALITY

SUBROUTINE LDVEG

PURPOSE

THIS ROUTINE LOADS THE VEGETATION MAP

INTEGER VEGTBL(5,3,64),VGCODE

REAL LAT,LNG

REAL VLAT(3)/2.0,-2.0,-6.0/

REAL VLNG(5)/74.0,70.0,66.0,62.0,58.0/

READ VEGETATION MAP

DO 10 I = 1,5

DO 10 J = 1,3

READ(02,900)(VEGTBL(I,J,K),K=1,64)

CONTINUE

FORMAT(4X,8I5)

RETURN

VEGCD COMPUTE CORRECT VEGETATION CODE

ENTRY VEGCD( TLAT,TLNG, VGCODE )

PURPOSE

THIS ROUTINE INPUTS A LATITUDE AND A  
LONGITUDE. WITH THESE A VEGETAION  
CODE IS DETERMINED

INPUT ARGUMENTS

TLAT	*	LATITUDE (DEG)
TLONG	*	EAST LONGITUDE(DEG)

OUTPUT ARGUMENT

VGCODE	*	VEGETATION CODE
--------	---	-----------------

LAT = TLAT

LNG = TLNG

CONVERT TO WEST LONGITUDE

LNG = 360.0 - LNG

DETERMINE VEGETATION CODE

ILAT = IFIX( (2.0 - LAT) / 4.0) + 1

ILNG = IFIX( (74.0 - LNG) / 4.0) + 1

INDEXX = IFIX( (VLAT(ILAT) - LAT) / 0.5)

INDEXY = IFIX( (VLNG(ILNG) - LNG) / 0.5) + 1

00000560  
00000570  
00000580  
00000590  
00000600  
00000610  
00000620  
00000630  
00000640  
00000650  
00000660  
00000670  
00000680  
00000690  
00000700  
00000710  
00000720  
00000730  
00000740  
00000750  
00000760  
00000770  
00000780  
00000790  
00000800  
00000810  
00000820  
00000830  
00000840  
00000850  
00000860  
00000870  
00000880  
00000890  
00000900  
00000910  
00000920  
00000930  
00000940  
00000950  
00000960  
00000970  
00000980  
00000990  
00001000  
00001010  
00001020  
00001030  
00001040  
00001050  
00001060  
00001070  
00001080  
00001090  
00001100

C INDEXZ = INDEXX \* 8 + INDEXY

-C VGCODE = VEGTEL(ILNG,ILAT,INDEXZ)

RETURN  
END

00001110  
00001120  
00001130  
00001140  
00001150  
00001160



[illegible][illegible][illegible][illegible][illegible][illegible][illegible][illegible]

00000560  
00000570  
00000580  
00000590  
00000600  
00000610  
00000620  
00000630  
00000640  
00000650  
00000660  
00000670  
00000680  
00000690  
00000700  
00000710  
00000720  
00000730  
00000740  
00000750  
00000760  
00000770  
00000780  
00000790  
00000800  
00000810  
00000820  
00000830  
00000840  
00000850  
00000860  
00000870  
00000880  
00000890  
00000900  
00000910  
00000920  
00000930  
00000940  
00000950  
00000960  
00000970  
00000980  
00000990  
00001000  
00001010  
00001020  
00001030  
00001040  
00001050  
00001060  
00001070  
00001080  
00001090  
00001100

[illegible]

N N O O N O W O O O Q N O N O O O O O - 1 O O O N N N N - 1 O - 1 N O N N N N N N N N N N N

[illegible][illegible][illegible][illegible]

O O O N W O O O N N O O O O O O O - N N O N N N N - O - O O O O O O

[illegible]

000001110  
000001120  
000001130  
000001140  
000001150  
000001160  
000001170  
000001180  
000001190  
000001200  
000001210  
000001220  
000001230  
000001240  
000001250  
000001260  
000001270  
000001280  
000001290  
000001300  
000001310  
000001320  
000001330  
000001340  
000001350  
000001360  
000001370  
000001380  
000001390  
000001400  
000001410  
000001420  
000001430  
000001440  
000001450  
000001460  
000001470  
000001480  
000001490  
000001500  
000001510  
000001520  
000001530  
000001540  
000001550  
000001560  
000001570  
000001580  
000001590  
000001600  
000001610  
000001620  
000001630  
000001640  
000001650

[illegible][illegible][illegible]

2222222000020002221002000012222201110222202222202210

[illegible][illegible][illegible]

00001660  
00001670  
00001680  
00001690  
00001700  
00001710  
00001720  
00001730  
00001740  
00001750  
00001760  
00001770  
00001780  
00001790  
00001800  
00001810  
00001820  
00001830  
00001840  
00001850  
00001860  
00001870  
00001880  
00001890  
00001900  
00001910  
00001920  
00001930  
00001940  
00001950  
00001960  
00001970  
00001980  
00001990  
00002000  
00002010  
00002020  
00002030  
00002040  
00002050  
00002060  
00002070  
00002080  
00002090  
00002100  
00002110  
00002120  
00002130  
00002140  
00002150  
00002160  
00002170  
00002180  
00002190  
00002200

00002210  
00002220  
00002230  
00002240  
00002250  
00002260  
00002270  
00002280  
00002290  
00002300  
00002310  
00002320  
00002330  
00002340  
00002350  
00002360  
00002370  
00002380  
00002390  
00002400  
00002410  
00002420  
00002430  
00002440  
00002450  
00002460  
00002470  
00002480  
00002490  
00002500  
00002510  
00002520  
00002530  
00002540  
00002550  
00002560  
00002570  
00002580  
00002590  
00002600  
00002610  
00002620  
00002630  
00002640  
00002650  
00002660  
00002670  
00002680  
00002690  
00002700  
00002710  
00002720  
00002730  
00002740  
00002750

[illegible]

O O O O O O O O O O O O O O O O N N N N N N N N N N N N N N N N

[illegible][illegible][illegible]

0000-0000NNNNNNNNNNNNNNNNNNNNNNNNNNNNNNNN

[illegible]

00002760  
00002770  
00002780  
00002790  
00002800  
00002810  
00002820  
00002830  
00002840  
00002850  
00002860  
00002870  
00002880  
00002890  
00002900  
00002910  
00002920  
00002930  
00002940  
00002950  
00002960  
00002970  
00002980  
00002990  
00003000  
00003010  
00003020  
00003030  
00003040  
00003050  
00003060  
00003070  
00003080  
00003090  
00003100  
00003110  
00003120  
00003130  
00003140  
00003150  
00003160  
00003170  
00003180  
00003190  
00003200  
00003210  
00003220  
00003230  
00003240  
00003250  
00003260  
00003270  
00003280  
00003290  
00003300



[illegible][illegible]

010001002000000022121122200021010000221000000

0020010022000000000000202000222210101222000002000010000

0101100220000002010222111022201100002200001000

1  
1  
0  
1  
0  
0  
0  
2  
0  
0  
0  
0  
0  
0  
0  
0  
0  
2  
2  
0  
2  
2  
2  
2  
2  
0  
2  
1  
1  
0  
2  
2  
2  
2  
2  
0  
0  
2  
2  
2  
2  
2  
2  
2  
2  
0  
0  
2  
2  
0  
0  
0  
2  
0

[illegible]

00003310  
00003320  
00003330  
00003340  
00003350  
00003360  
00003370  
00003380  
00003390  
00003400  
00003410  
00003420  
00003430  
00003440  
00003450  
00003460  
00003470  
00003480  
00003490  
00003500  
00003510  
00003520  
00003530  
00003540  
00003550  
00003560  
00003570  
00003580  
00003590  
00003600  
00003610  
00003620  
00003630  
00003640  
00003650  
00003660  
00003670  
00003680  
00003690  
00003700  
00003710  
00003720  
00003730  
00003740  
00003750  
00003760  
00003770  
00003780  
00003790  
00003800  
00003810  
00003820  
00003830  
00003840  
00003850

[illegible][illegible][illegible][illegible][illegible][illegible][illegible]

00003860  
00003870  
00003880  
00003890  
00003900  
00003910  
00003920  
00003930  
00003940  
00003950  
00003960  
00003970  
00003980  
00003990  
00004000  
00004010  
00004020  
00004030  
00004040  
00004050  
00004060  
00004070  
00004080  
00004090  
00004100  
00004110  
00004120  
00004130  
00004140  
00004150  
00004160  
00004170  
00004180  
00004190  
00004200  
00004210  
00004220  
00004230  
00004240  
00004250  
00004260  
00004270  
00004280  
00004290  
00004300  
00004310  
00004320  
00004330  
00004340  
00004350  
00004360  
00004370  
00004380  
00004390  
00004400

[illegible][illegible]

3  
3  
3  
3  
3  
3  
3  
3  
3  
3  
3  
3  
3  
3  
3  
3  
0  
2  
2  
2  
1  
0  
0  
0  
0  
3  
3  
3  
3  
3  
3  
3  
3  
3  
3  
3  
3  
3

[illegible]

3  
3  
3  
3  
3  
3  
3  
3  
3  
3  
3  
3  
3  
3  
3  
0  
0  
0  
0  
0  
0  
0  
3  
3  
3  
3  
3  
3  
3  
3  
3  
3  
3  
3  
3

3  
3  
3  
3  
3  
3  
3  
3  
3  
3  
3  
0  
0  
0  
2  
2  
2  
0  
3  
3  
3  
3  
3  
3  
3  
3  
3  
3  
3  
3

[illegible]

3  
3  
3  
3  
3  
3  
3  
3  
3  
3  
3  
3  
3  
3  
3  
3  
3  
3  
2  
0  
0  
0  
0  
0  
2  
2  
3  
3  
3  
3  
3  
3  
3  
3  
3  
3  
3  
3

00004410  
00004420  
00004430  
00004440  
00004450  
00004460  
00004470  
00004480  
00004490  
00004500  
00004510  
00004520  
00004530  
00004540  
00004550  
00004560  
00004570  
00004580  
00004590  
00004600  
00004610  
00004620  
00004630  
00004640  
00004650  
00004660  
00004670  
00004680  
00004690  
00004700  
00004710  
00004720  
00004730  
00004740  
00004750  
00004760  
00004770  
00004780  
00004790  
00004800

[illegible]

00000010  
00000020  
00000030  
00000040  
00000050  
00000060  
00000070  
00000080  
00000090  
00000100  
00000110  
00000120  
00000130  
00000140  
00000150  
00000160  
00000170  
00000180  
00000190  
00000200  
00000210  
00000220  
00000230  
00000240  
00000250  
00000260  
00000270  
00000280  
00000290  
00000300  
00000310  
00000320  
00000330  
00000340  
00000350  
00000360  
00000370  
00000380  
00000390  
00000400  
00000410  
00000420  
00000430  
00000440  
00000450  
00000460  
00000470  
00000480  
00000490  
00000500  
00000510  
00000520  
00000530  
00000540  
00000550

ORIGINAL PAGE IS  
OF POOR QUALITY

7	7	1	10	2	2	2	2	00000560
7	7	9	2	2	2	2	2	00000570
7	4	4	7	2	2	2	2	00000580
8	8	8	8	2	8	8	8	00000590
8	8	8	8	8	8	8	8	00000600
2	8	2	8	8	8	8	8	00000610
8	8	2	8	8	8	8	8	00000620
8	2	8	8	8	2	8	8	00000630
8	8	8	8	8	8	8	11	00000640
2	2	2	8	2	2	11	12	00000650
2	2	8	8	2	2	12	8	00000660
8	8	8	8	11	11	8	11	00000670
8	8	11	11	11	11	8	11	00000680
2	2	11	11	11	8	8	11	00000690
11	11	11	11	12	12	2	11	00000700
11	11	11	2	11	11	2	11	00000710
2	11	11	11	2	2	2	2	00000720
2	8	2	2	11	0	0	0	00000730
11	8	2	2	11	11	11	11	00000740
12	12	11	11	2	2	2	2	00000750
12	11	11	2	2	2	2	2	00000760
8	2	2	2	2	2	2	2	00000770
8	2	2	2	2	2	2	2	00000780
15	16	2	2	2	2	2	2	00000790
16	16	2	2	2	2	2	2	00000800
2	16	16	2	2	2	2	2	00000810
2	2	2	2	11	2	2	8	00000820
8	8	8	12	12	4	4	4	00000830
8	4	8	8	8	4	4	8	00000840
8	8	8	8	8	8	8	11	00000850
8	8	12	12	8	8	12	11	00000860
11	11	12	12	12	12	11	11	00000870
12	8	12	11	11	2	2	2	00000880
8	12	11	11	11	2	2	2	00000890
11	11	11	11	11	2	2	2	00000900
11	11	11	2	11	2	2	2	00000910
11	2	2	2	11	11	2	2	00000920
11	11	2	2	2	11	11	2	00000930
11	11	2	2	2	2	2	2	00000940
11	2	2	2	2	2	2	2	00000950
2	2	2	2	2	2	2	2	00000960
11	11	2	11	2	2	2	2	00000970
2	2	2	2	2	2	2	2	00000980
2	2	2	11	2	2	2	2	00000990
2	2	11	11	11	2	2	2	00001000
2	2	11	2	2	2	2	2	00001010
2	2	11	2	2	11	2	2	00001020
2	2	2	2	2	11	11	11	00001030
8	8	2	8	8	11	11	11	00001040
8	8	8	8	8	8	8	12	00001050
4	4	4	8	2	2	12	8	00001060
4	4	8	2	2	2	2	2	00001070
8	8	8	2	2	2	2	2	00001080
2	2	2	2	2	2	2	2	00001090
11	11	11	2	2	2	2	2	00001100


11	2	2	2	2	2	2	2
2	2	2	2	2	2	2	2
2	2	2	2	2	2	2	2
2	2	2	2	2	2	2	2
2	2	2	2	2	2	2	2
11	11	11	11	2	2	2	2
11	11	11	11	11	11	11	2
2	2	19	20	20	11	2	2
2	11	11	19	19	19	19	2
2	11	2	2	19	19	19	2

00001110  
00001120  
00001130  
00001140  
00001150  
00001160  
00001170  
00001180  
00001190  
00001200

APPENDIX B


PLOTS OF INCIDENCE ANGLE VARIATIONS  
FOR BEAM 1, 2, 3

SCATTERING COEFFICIENT vs INCIDENCE ANGLE.  
VERTICAL POLARIZATION, BEAM 1

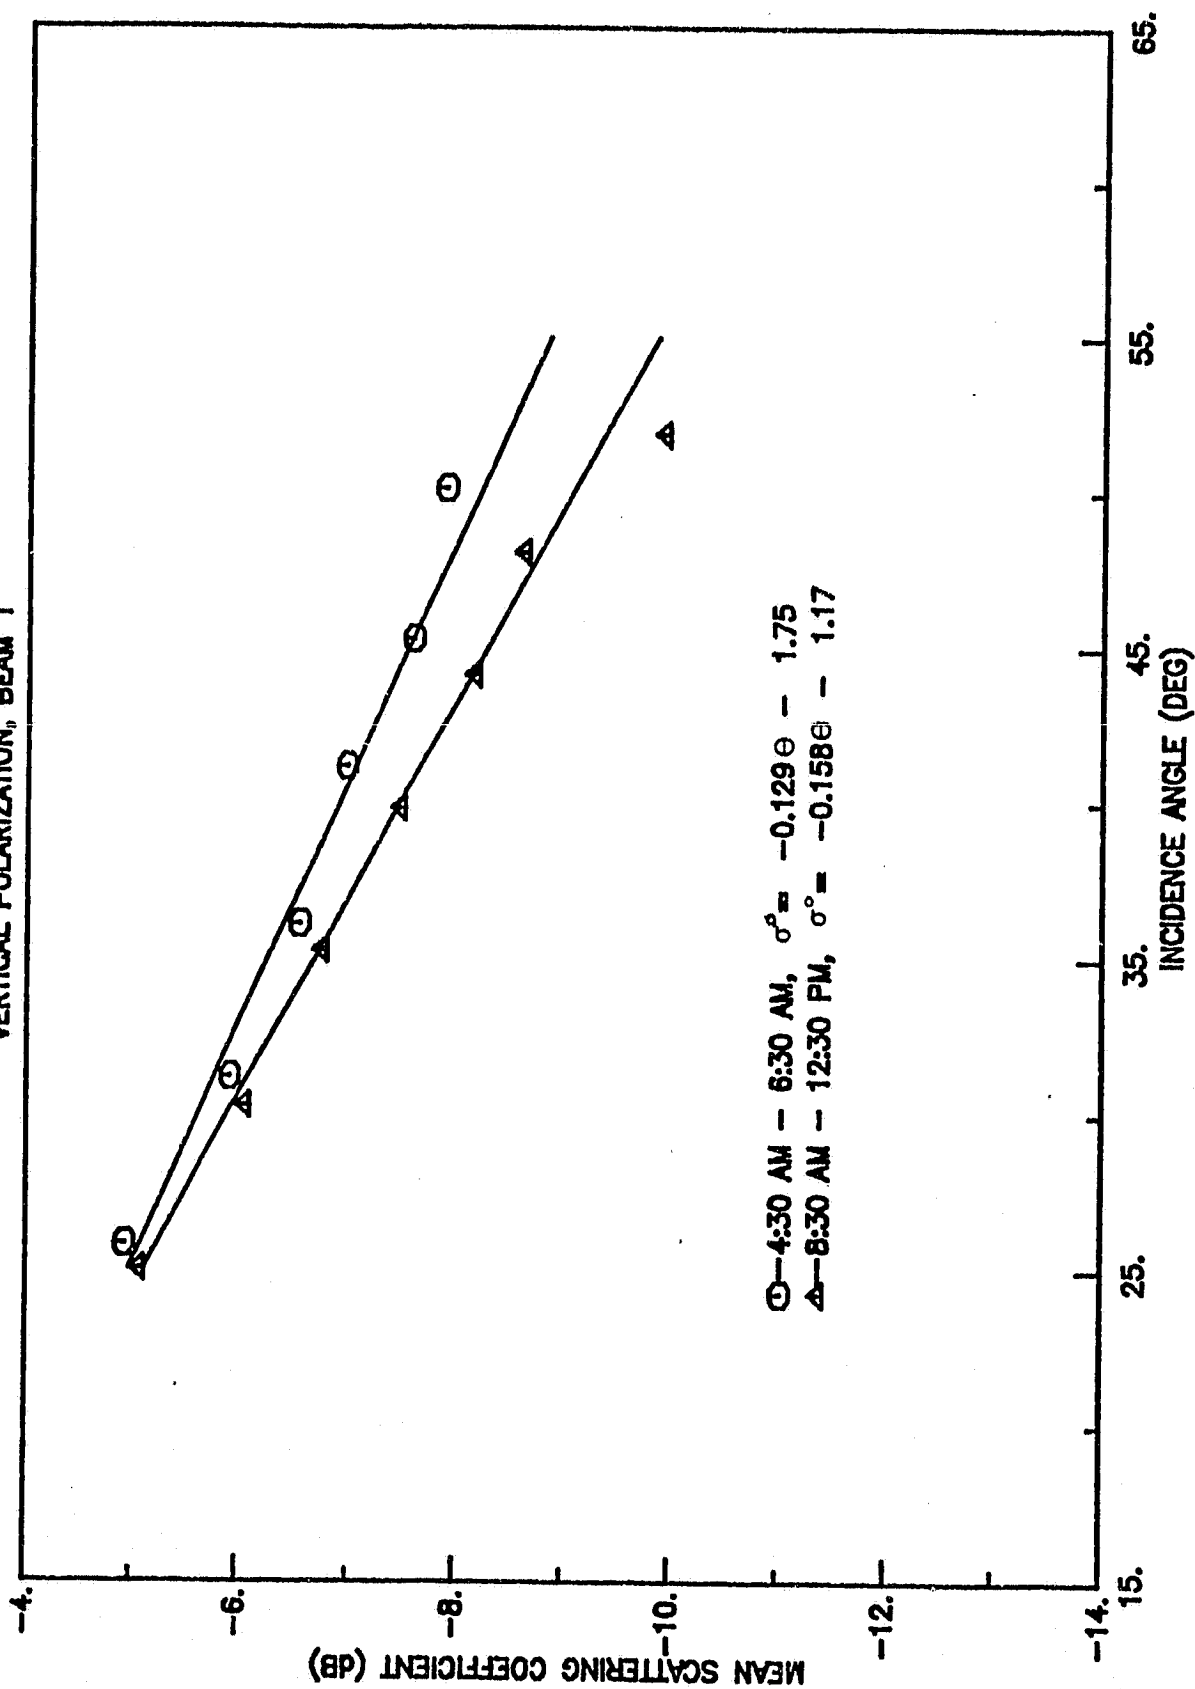





SCATTERING COEFFICIENT VS INCIDENCE ANGLE  
VERTICAL POLARIZATION, BEAM 1

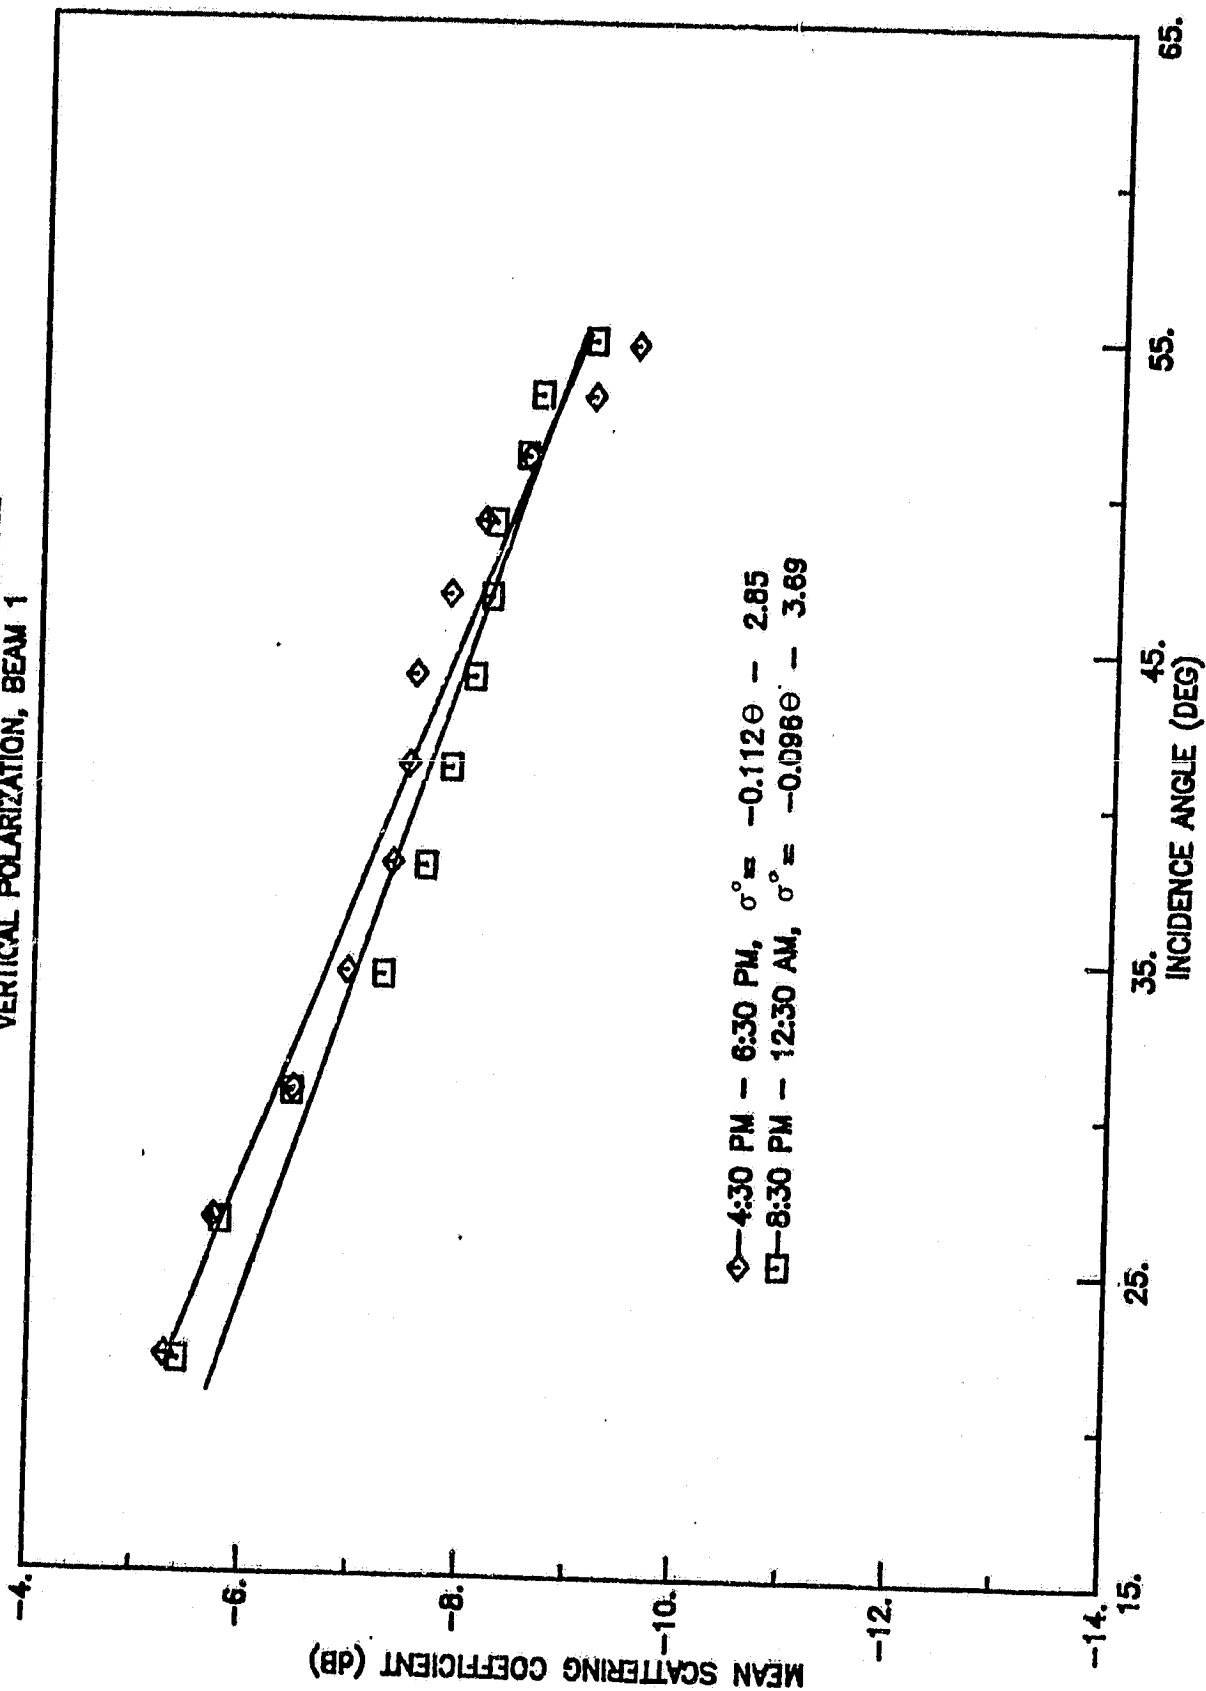

SCATTERING COEFFICIENT vs INCIDENCE ANGLE  
VERTICAL POLARIZATION, BEAM 2

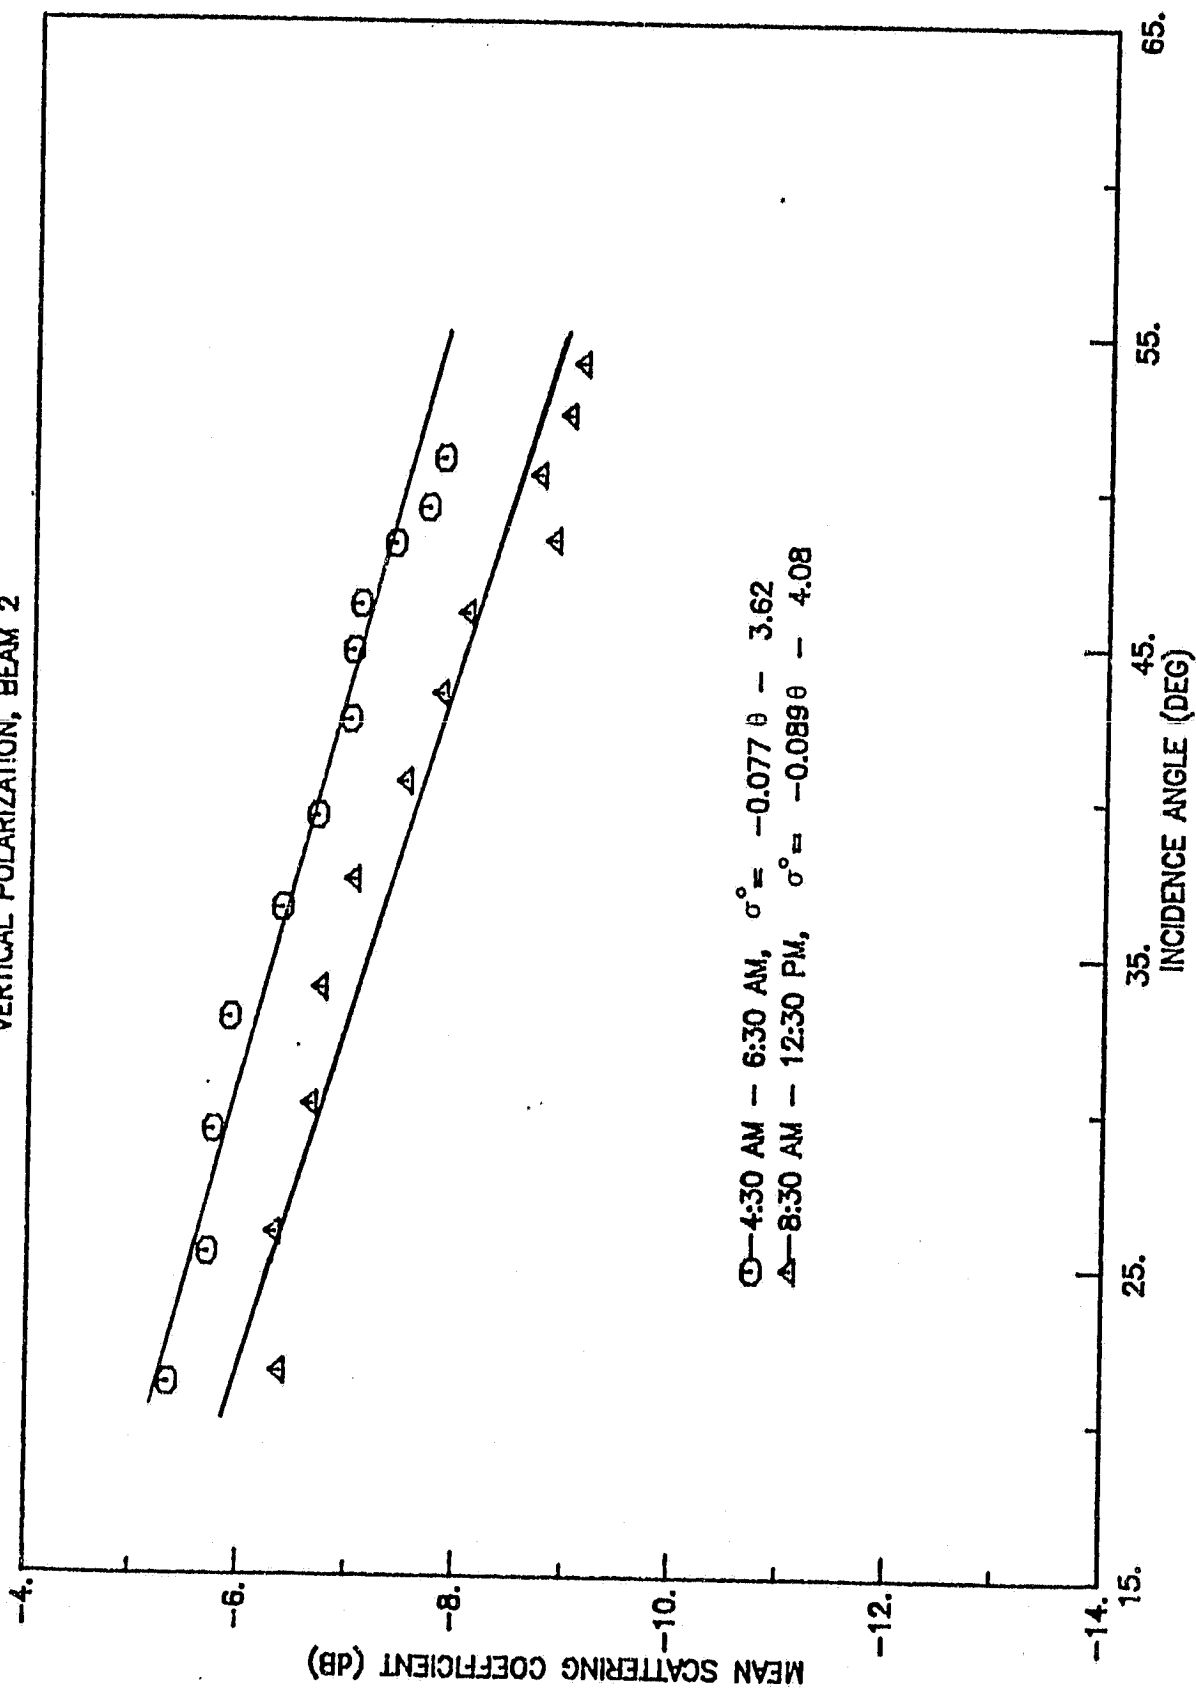


SCATTERING COEFFICIENT vs INCIDENCE ANGLE  
VERTICAL POLARIZATION, BEAM 2

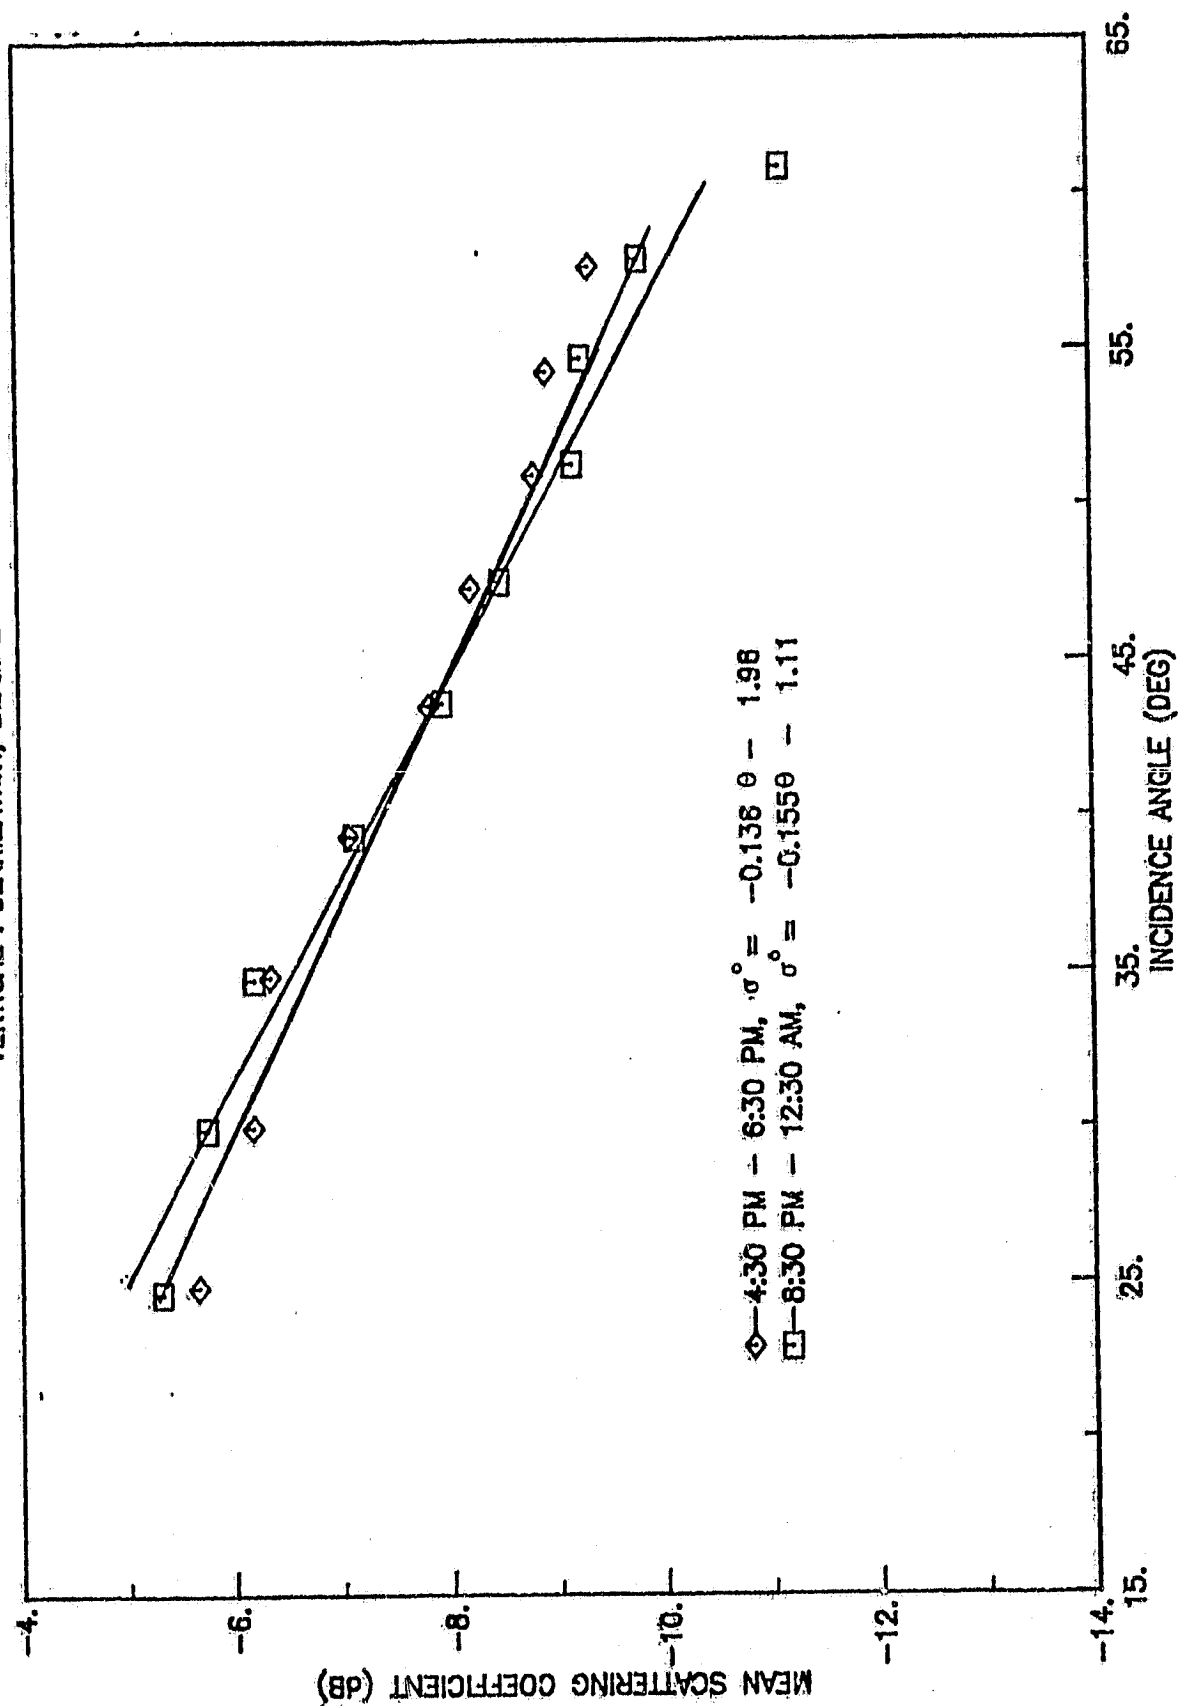

ORIGINAL PAGE IS  
OF POOR QUALITY

SCATTERING COEFFICIENT VS INCIDENCE ANGLE  
VERTICAL POLARIZATION, BEAM 3

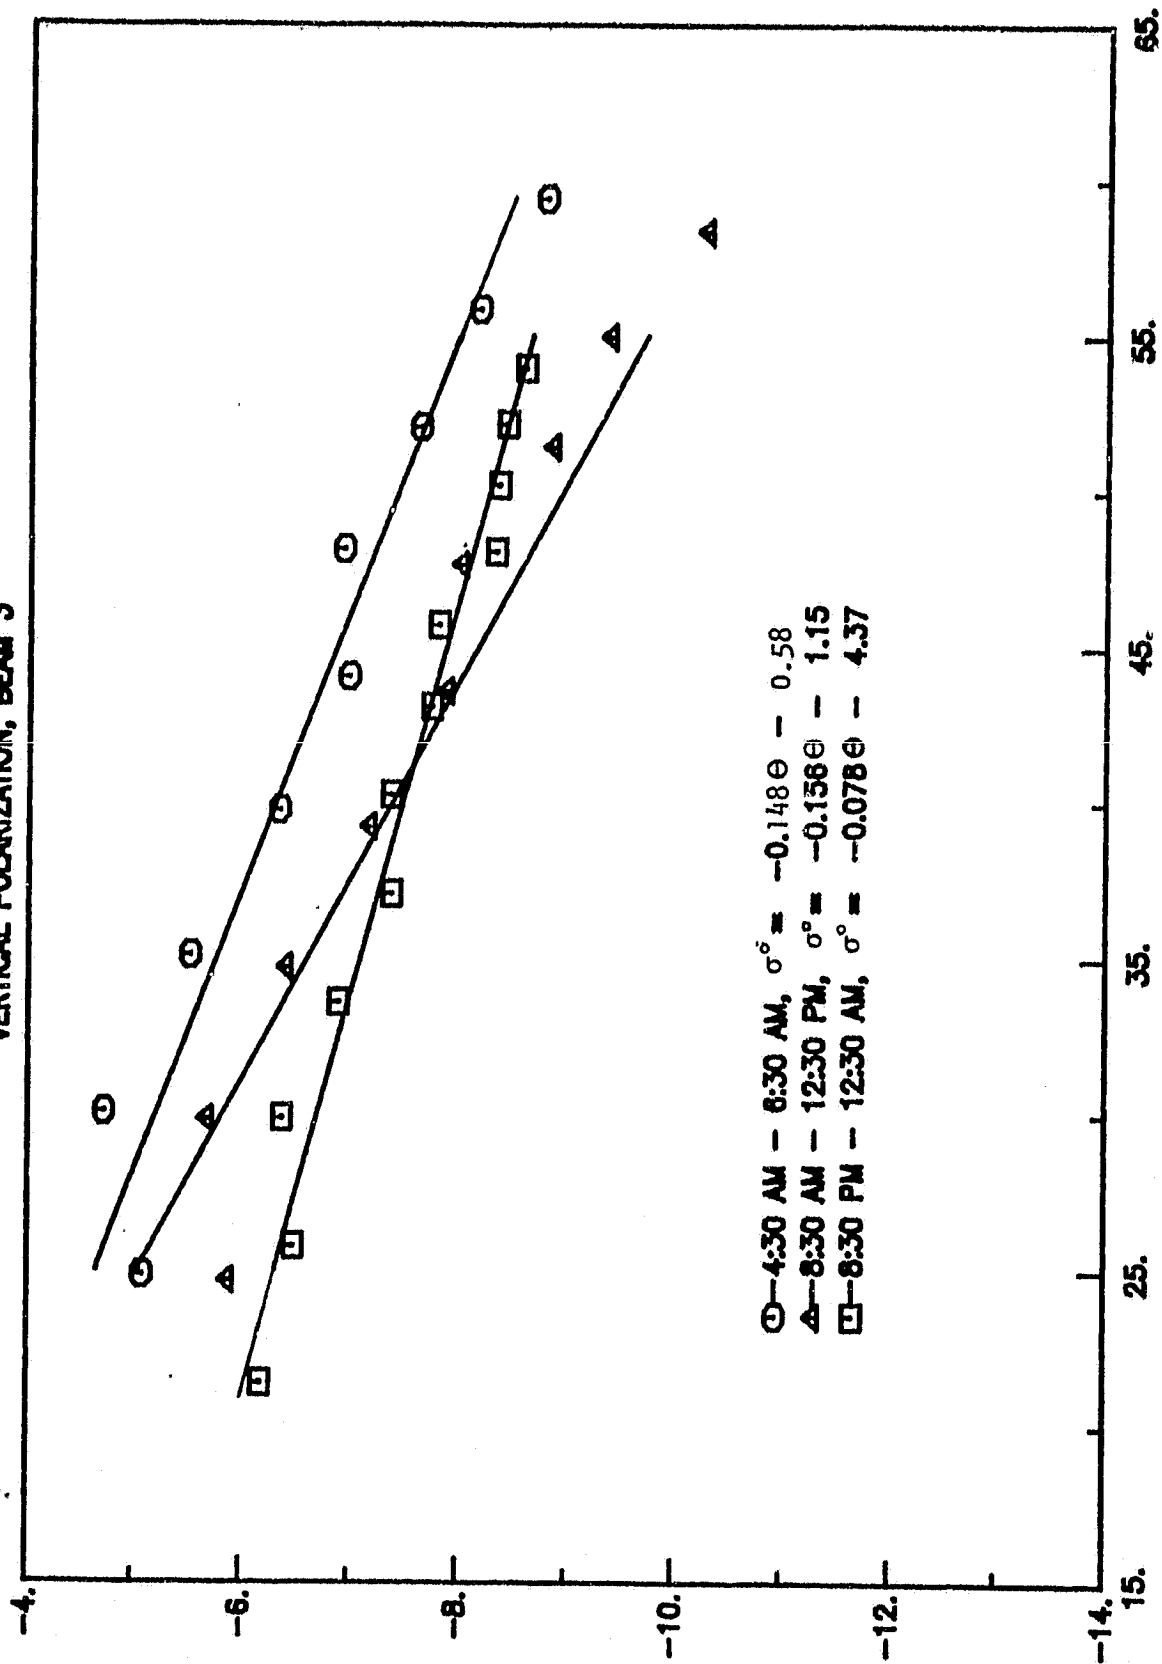

48 8-49  
YTLW

APPENDIX C

NOSS ALGORITHM SPECIFICATION SHEETS

SUBMODULE

IDENTIFICATION	TITLE
1.12.1	Co-location of SCATT with LAMMR $T_B$ 's Over the Amazon
1.12.2	Rain Flags
1.12.3	Data Base Creation
1.12.4	Relative Target Creation
1.12.5	Relative Antenna Gain Interpolation
1.12.6	Standard $\sigma^0$ Interpolation
1.12.7	Relative Gain Table and Antenna Pointing Angle Corrections
1.12.8	Long Range Monitoring of Relative Biases

- I. SUBMODULE REFERENCE NO. 1.12.1
- II. SENSOR: SCATT
- III. ORIGINATOR/PHONE: E.M. BRACALENTE, I.J. BIRRER/804-827-3631, 913-864-4836
- IV. SUBMODULE TITLE: SCATT-LAMMR 37 GHz Colocation over the Amazon
- V. SUBMODULE FUNCTION: This algorithm colocates the LAMMR brightness temperatures at 37 GHz with the SCATT data over the Amazon.
- VI. INPUTS:
  - (1) SCATT data over the Amazon (50 km data blocks)
  - (2) LAMMR brightness temperatures at 37 GHz over the Amazon (50 km data blocks)
- VII. OUTPUTS: SCATT data vector with colocated LAMMR  $T_b$ 's appended to data vector.
- VIII. AUXILIARY DATA: TBD
- IX. EXCEPTIONS: TBD
- X. PROCESSING REQUIRED: TBD
- XI. COMMENTS: Since the calculation of brightness temperatures is a level II computation and this is a LEVEL I SCATT algorithm, provision must be made to feed back the LAMMR  $T_b$ 's to this algorithm on a non-real time basis. The input data stream for both the SCATT and the LAMMR is assumed to be in 50 km data blocks and will be assigned subgrid coordinates (i,j). For these coordinates the following procedure could be used for colocation:
  - (a) Sort the LAMMR and SCATT independently by grid coordinates into two row ordered lists as follows:

$$\text{LAMMR LIST} = T_b \begin{matrix} , & T_b & , & T_b & \dots & T_b & , & T_b & , & T_b & \dots & T_b \\ 1,1 & 1,2 & 1,3 & & 1,N & 2,1 & 3,2 & & M,N \end{matrix}$$

$$\text{SCATT LIST} = \text{SCATT} \begin{matrix} , & \text{SCATT} & , & \dots & \text{SCATT} & , & \text{SCATT} & , & \text{SCATT} & , & \text{SCATT} \\ 1,1 & 1,2 & & & 1,Q & 2,1 & 2,2 & & P,Q \end{matrix}$$

where  $T_b$  is the 37 GHz brightness temperature of grid coordinate  
 $i,j$   $i,j$

SCATT is the scatterometer data vector at grid coordinate  
 $i,j$   $i,j$

1.12.1(2)

- (b) Colocate SCATT and LAMMR data by simply moving down the lists in parallel. For each SCATT append the corresponding  $T_{b,i,j}$ . If more than one brightness temperature exists, choose the closest.



- I. SUBMODULE REFERENCE NO: 1.12.2
- II. SENSOR: SCATT
- III. ORIGINATOR/PHONE: E.M. Bracalente, I.J. Birrer/804-827-3631, 913-864-4836
- IV. SUBMODULE TITLE: RAIN FLAG
- V. SUBMODULE FUNCTION: Set a rain flag if the LAMMR brightness temperature at 37 GHz is below a critical value,  $T_{\text{cut}}$ , to indicate the possibility of rain.
- VI. INPUTS:  
LAMMR  $T_B$ 's at 37 GHz colocated with SCATT cells (Submodule 1.12.1)
- VII. OUTPUTS:  
Rainflag (RFLAG)
- VIII. AUXILIARY DATA: TBD
- IX. EXCEPTIONS: TBD
- X. PROCESSING REQUIRED:  
(a) If  $T_{B37}$  is less than  $T_{\text{cut}}$ , then RFLAG = 1 (true), otherwise RFLAG = 0 (false).
- XI. COMMENTS:  
(a) This procedure may be designed to handle a cell at a time or all of the cells for a particular beam.  
(b) The value of  $T_{\text{cut}}$  must be determined experimentally from LAMMR data. This could be done by plotting a histogram of LAMMR data over the Amazon taken on the first several passes. An initial guess for  $T_{\text{cut}}$  will be provided based on SeaSat-SMMR data.

1.12.3(1)

- I. SUBMODULE REFERENCE NO: 1.12.3
- II. SENSOR: SCATT
- III. ORIGINATOR/PHONE: E.M. Bracalente, I.J. Birrer/804-827-3631, 913-864-4836
- IV. SUBMODULE TITLE: DATA BASE CREATION
- V. SUBMODULE FUNCTIONS: This module creates a data base of SCATT data over the Amazon rain forest. Data that is not flagged for rain (Submodule 1.12.2) is sorted by beam, polarization, cell no. At the end of each pass over Brazil, the mean NRCS, standard deviation of NRCS, average incidence angle, and average antenna broadbeam angle for each combination of beam, cell, and polarization are computed. These results along with the number of points in each bin are stored in a semi-permanent fashion (tape, disk) for later processing.  
Plots of mean NRCS ( $\bar{\sigma}^0$ ) versus cell no. are made for any combination of beam, polarization, etc. for which data exists.

VI. INPUTS:

SCATT data over Amazon.  
Rain Flag. (Submodule 1.12.2)

VII. OUTPUTS:

<u>Key Parameters</u>	<u>No. of Parameters</u>
Mean NRCS ( $\bar{\sigma}^0$ )	600*
Standard Deviation $\Delta\sigma^0$	600*
Count (N)	600*
Average Incidence Angle $\bar{\theta}$	600*
Average Broadbeam Antenna Angle $\bar{\epsilon}$	600*
Pointer (P)	600

\*Temporary data storage must be sufficient to store results from up to 20 passes or approximately 60,600 parameters.

VIII. AUXILIARY DATA: None

IX. EXCEPTIONS: If there are less than  $\approx 20$  points within a bin, no processing is performed.

X. PROCESSING REQUIRED:

(a) Sort data by beam (i), cell(j), polarization(k) (see note 1).

- (b) At the end of each pass, for each combination of  $i, j, k$  where there are more than 20 values, compute

$$l = P_{i,j,k}$$

$$\overline{\sigma}_{i,j,k,l}^0 = \frac{1}{N_{i,j,k}} \sum_{n=1}^{N_{i,j,k}} \sigma_{i,j,k,n}^0$$

$$\Delta \sigma_{i,j,k,l}^0 = \left( \frac{\sum_{n=1}^{N_{i,j,k}} (\sigma_{i,j,k,n}^0)^2 - N_{i,j,k} \overline{\sigma}_{i,j,k,l}^0}{N_{i,j,k} - 1} \right)^{1/2}$$

$$\overline{\theta}_{i,j,k,l} = \frac{1}{N_{i,j,k}} \sum_{n=1}^{N_{i,j,k}} \theta_{i,j,k,n}$$

$$\overline{\epsilon}_{i,j,k,l} = \frac{1}{N_{i,j,k}} \sum_{n=1}^{N_{i,j,k}} \epsilon_{i,j,k,n}$$

$$P_{i,j,k} = P_{i,j,k} + 1$$

where  $N_{i,j,k}$  is the number of points in each  $i, j, k$  bin.

- (c) Plot  $\overline{\sigma}^0$  versus cell number ( $j$ ) for different combinations of beam ( $i$ ) and polarization ( $k$ )

#### X. COMMENTS:

- (1) Semi-permanent storage should be provided for all of the input SCATT and LAMMR data over the Amazon.
- (2)  $\sigma^0$  are assumed to be in ratio form.
- (3) Well-written computer code should only need to store running sums during each pass and not all of the data values.

Note 1: Other sorting parameters may be required.

- I. SUBMODULE REFERENCE NO. 1.12.4
- II. SENSOR: SCATT
- III. ORIGINATOR/PHONE: E.M. Bracalente, I.J. Birrer/804-827-3631, 913-864-4836
- IV. SUBMODULE TITLE: Relative target creation
- V. SUBMODULE FUNCTION: This submodule takes the summary Amazon data (Means and Standard deviations) and creates a table of  $\sigma^0(\theta)$  at  $1^\circ$  incidence angle steps for the off-nadir incidence angle data of the SCATT. This submodule will require considerable human interaction off-line.
- VI. INPUTS:  
Mean, Standard deviations, average incidence angles from submodule 1.12.3.  
Plots of  $\sigma^0$  versus cell no. from submodule 1.12.3.
- VII. OUTPUT:  
Table of NRCS in one degree steps over the off-nadir incidence angle range for both H and V polarizations.
- VIII. AUXILIARY DATA: TBD
- IX. EXCEPTIONS: TBD
- X. PROCESSING REQUIRED: Since this task will require consistent human evaluation and decision, it will not be possible initially to fully automate this procedure. The following steps are envisioned at this point:
  - (a) Compare data from each polarization and beam with SeaSat Brazil model (or other models of Brazil if available). This will be done by:
    - (1) Examining the plots from Submodule 1.12.3.
    - (2) Regressing Mean NRCS ( $\sigma^0$ ) against the general model  $\sigma^0 = F(\theta)$  determined from SeaSat.
  - (b) If the results from (a) show a good fit with SeaSat model (except for a level shift), the SeaSat model will be adopted as the standard target. (Level shifted, if necessary). The beam which best fits the SeaSat model for each polarization will be used to determine the level shift.
  - (c) If the data from the SCATT is best modeled by a different function than was used with the SeaSat, this model may be chosen to generate the standard table.
- XI. COMMENTS:
  - (1) The exact approach taken will probably be determined from a preliminary analysis of a few passes.
  - (2) If there is good agreement with the SASS model or a satisfactory new model developed, it may be possible to automate the procedure.

- I. SUBMODULE REFERENCE NO: 1.12.5
- II. SENSOR: SCATT
- III. ORIGINATOR/PHONE: E.M. Bracalente, I.J. Birrer/804-827-3631, 913-864-4836
- IV. SUBMODULE TITLE: Relative Antenna Gain Interpolation
- V. SUBMODULE FUNCTIONS: Use a three-point interpolation to determine the relative antenna gain at the input incidence angle.
- VI. INPUTS:  
Mean incidence angle ( $\bar{\theta}$ ) and mean antenna broadbeam antenna angle ( $\bar{\epsilon}$ ) corresponding to each  $\theta$  and value of pointing angle  $\theta_{np}$
- VII. OUTPUT:  
Relative antenna gain  $G/G_o(\bar{\theta})$
- VIII. AUXILIARY DATA:  
to table of relative gain values in Module 1.6
- IX. EXCEPTIONS: TBD
- X. PROCESSING REQUIRED:
  - (a)  $\epsilon = \bar{\epsilon} + (\theta_p - \theta_{np})$
  - (b) Find  $\epsilon_1$ , the integer smaller than  $\epsilon$   
 $Z = \theta$
  - (c)  $P = \epsilon - \epsilon_1$
  - (d)  $G/G_o(Z) = \frac{P(P-1)}{2} G(\epsilon_1-1) + (1-P^2)G(\epsilon_1) + \frac{P(P+1)}{2} G(\epsilon_1+1)$   
where  $G/G_o(Z)$  is the relative gain at an incidence angle of Z degrees.
- XI. COMMENTS: TBD

- I. SUBMODULE REFERENCE NO: 1.12.6
- II. SENSOR: SCATT
- III. ORIGINATOR/PHONE: E.M. Bracalente, I.J. Birrer/804-827-3631, 913-864-4836
- IV. TITLE: Standard  $\sigma^O$  Interpolation
- V. SUBMODULE FUNCTIONS: Use a three-point interpolation to determine the standard NRCS of the Amazon rain forest at the input incidence angle.
- VI. INPUT: Incidence angle ( $\theta$ )
- VII. OUTPUT: Standard NRCS  $\sigma_A^O$
- VIII. AUXILIARY DATA:  
Tabular form of standard radar target  
or  
Tabular form of relative target from Submodule i.12.4.
- IX. EXCEPTIONS: TBD
- X. PROCESSING REQUIRED:
  - (a) Find  $\theta_1$  the largest integer smaller than  $\theta$
  - (b)  $P = \theta - \theta_1$
  - (c)  $\sigma_A^O(\theta) = \frac{P(P-1)}{2} \sigma^O(\theta_1 - 1) + (1 - P^2) \sigma^O(\theta_1) + \frac{P(P+1)}{2} \sigma^O(\theta_1 + 1)$   
where  $\sigma^O(Z)$  is the NRCS of the Amazon rain forest at an incidence angle of Z degrees.
- XI. COMMENTS: TBD

I. SUBMODULE REFERENCE: 1.12.7

II. SENSOR: SCATT

III. ORIGINATOR/PHONE: E.M. Bracalente, I.J. Birrer/804-827-3631, 913-864-4836

IV. SUBMODULE TITLE: Relative Gain and Antenna Pointing Angle Corrections

V. SUBMODULE FUNCTIONS: This submodule is designed to provide an output to be used to verify and locate possible errors in the relative gain table (Module 1.6) and in the antenna pointing angle estimates. A maximum likelihood process will be applied using the means and standard deviations determined in Submodule 1.12.3 to estimate values for the antenna gain bias and pointing angle for each combination of beam, cell, and polarization. Average biases and pointing angle for each beam and polarization are also computed.

VI. INPUTS:

(1) Mean  $\sigma^0$ , standard deviation of  $\sigma^0$ , and average incidence angle for the Amazon rain forest passes (Submodule 1.12.3 outputs).

VII., OUTPUTS:

<u>Key Parameters</u>	<u>No. of parameters</u>
Antenna biases ( $\hat{\alpha}$ )	600
Pointing angles ( $\hat{\theta}_p$ )	600
Average biases ( $\bar{\alpha}$ )	12
Average Pointing angles ( $\bar{\theta}_p$ )	12

VIII. AUXILIARY DATA: Nominal Pointing Angle, ( $\theta_p$ )  $\Delta\alpha$ ,  $\Delta\theta_p$

IX. EXCEPTIONS: TBD

X. PROCESSING REQUIRED:

For each combination of beam (i), cell (j), and polarization (k) perform the following algorithm (i x j x k = 600 times).

(a)  $\alpha_0 = 1.0$ ,  $\theta_{0p} = \theta_p$  (the nominal pointing angle)

(b) Determine a 3 x 3 matrix,  $g_{m,n}$  as follows:

$$\alpha_m = \alpha_0 + m \Delta\alpha; m = 1, 0, 1$$

$$\theta_{np} = \theta_{0p} + n \Delta\theta_p; n = -1, 0, 1$$

$$g_{m,n} = \frac{-1}{2} \sum_{\ell=1}^{10} \left\{ \overline{\sigma_{i,j,k,\ell}^0} - \alpha_m \frac{[G/G_0(\theta_{np})]^2}{[G/G_0(\theta_p)]^2} \sigma_A^0 \right\}^2$$

where

$G/G\emptyset ( )$  is the output of Submodule 1.12.5 at  $\bar{\theta}_{1,j,k,l}$

$\sigma_A^0 ( )$  is the output of Submodule 1.12.6 at  $\bar{\theta}_{1,j,k,l}$

$\bar{\sigma}^0$  and  $\bar{\theta}$  are the output of Submodule 1.12.3

(c) Search the matrix  $g_{m,n}$  for the maximum value  $g_{mmax,nmax}$

If  $mmax = nmax = 0$  go to (d);

otherwise  $\alpha_0 = \alpha_{mmax}$

$\theta_0^p = \theta_{p,nmax}$

repeat (b)

(d) Compute the constants of a bivariate interpolating polynomial for  $g$ .

$$a = \frac{g_{1,0}}{2} - g_{0,0} + \frac{g_{1,0}}{2}$$

$$b = \frac{-g_{-1,0}}{2} + \frac{g_{1,0}}{2}$$

$$c = \frac{g_{0,-1}}{2} - g_{0,0} + \frac{g_{0,1}}{2}$$

$$d = \frac{-g_{0,-1}}{2} + \frac{g_{0,1}}{2}$$

$$e = g_{0,0} - g_{1,0} - g_{0,1} + g_{1,1}$$

$$f = g_{0,0}$$

where  $g_{m,n}$  are the points of the  $3 \times 3$  matrix

(e) Solve for antenna bias, pointing angle

$$\hat{\alpha}_{i,j,k} = \alpha_0 + \frac{\Delta\alpha(ed - 2bc)}{4ac - e^2}$$

$$\hat{\theta}_{p,i,j,k} = \theta_0^p + \frac{\Delta\theta_p(be - 2ad)}{4ac - e^2}$$

(f) Compute average parameter over each beam and polarization

$$\bar{\alpha}_{i,k} = 1/50 \sum_{j=1}^{50} \hat{\alpha}_{i,j,k}$$



$$\bar{\theta}_p = \frac{1}{50} \sum_{j=1}^{50} \hat{\theta}_{p_{i,j,k}}$$

## XI. COMMENTS:

- (1) It is assumed that this processing must take place only for the outer 50 cells.
- (2) Initial values for  $\Delta\alpha$ ,  $\Delta\theta_p$  are 0.2 and 1.0 respectively.
- (3) A test should be made to tell if there are at least  $\approx 10$  elements in each beam, cell, polarization bin of the input data before this submodule is called. The bins are set to handle up to 20 elements to allow for the varying rates of filling. (On the long term average the bins will fill at the same rate). After the first 10 levels are processed by this submodule, further data from 1.12.3 may be stored over this data. This test can be performed by interrogating  $P_{i,j,k}$  of Submodule 1.12.3.
- (4) Mean  $\sigma^0$  and standard deviation of  $\sigma^0$  should be in ratio form.

- I. SUBMODULE REFERENCE NO: 1.12.8
- II. SENSOR: SCATT
- III. ORIGINATOR/PHONE: E.M. Bracalente, I.J. Birrer/804-827-3631, 913-864-4836
- IV. SUBMODULE TITLE: Long-Term Monitoring of Relative Biases
- V. SUBMODULE FUNCTION: Given the value of the pointing angle for each beam and polarization, compute the relative bias for each of the cells in that beam; also, provide long term checks for both biases and antenna patterns.
- VI. INPUTS:
  - (1) Mean NRCS ( $\overline{\sigma^0}$ ) and average incidence angles for the Amazon rain forest passes (SUBMODULE 1.12.3 outputs)
  - (2) Previously determined average pointing angles ( $\overline{\theta_p}$ ) for each beam (i) and polarization (k) (Submodule 1.12.7 outputs).
  - (3) Initial guess for relative biases - outputs from either submodule 1.12.7 ( $\overline{\alpha}$ ) or some first guess (e.g., 1.0).

VII. OUTPUTS

<u>Key Parameter</u>	<u>No. of Parameters</u>
Antenna bias ( $\hat{\alpha}$ )	600
Average biases ( $\overline{\alpha}$ )	12

VIII. AUXILIARY DATA: Standard radar target, or output from Submodule 1.12.4,  $\Delta\alpha$

IX. EXCEPTIONS: TBD

X. PROCESSING REQUIRED:

For each combination of beam (i), cell (j) and polarization (k)  
perform the following algorithm (i x j x k = 600 times).

(a)  $\alpha_o = \hat{\alpha}_{i,j,k}$  if available; otherwise  $\alpha_o = 1.0$ .

(b) Determine a 3 element vector,  $g_m$ , as follows:

$$\alpha_m = \alpha_o + m\Delta\alpha; m = 1, 0, 1$$

$$g_m = -\frac{1}{2} \sum_{\ell=1}^{10} ([\overline{\sigma^0}_{i,j,k,\ell} - \alpha_m \sigma_A^0])^2$$

where  $\sigma_A^0$  ( ) is the output of submodule 1.12.6 at  $\overline{\theta}_{i,j,k,\ell}$   
 $\overline{\sigma^0}$  and  $\overline{\theta}$  are the output of submodule 1.12.3

$$(c) \quad \hat{\alpha}_{1,j,k} = \alpha_0 + \Delta\alpha \left( \frac{g_1 - g_{-1}}{g_{-1} - 2g_0 + g_1} \right)$$

$$(d) \quad \bar{\alpha}_{1,k} = \frac{1}{50} \sum_{j=1}^{50} \hat{\alpha}_{1,j,k}$$

XI. COMMENTS:

- (1) It is assumed that this processing will take place only for the outer 50 cells of the Scatt Beams.
- (2) Initial value for  $\Delta\alpha$  is 0.2
- (3) As in Submodule 1.12.7, a test must be made to be sure that there are 10 elements in each bin. (For further details see Submodule 1.12.7 see XI 3).
- (4) Mean  $\sigma^0$  and standard deviation of  $\sigma^0$  must be in ratio form.